

Solid State Relays 3-Phase with Integrated Heatsink Proportional Switching Controllers Types RGC2P, RGC3P



- 2-pole and 3-pole analog switching solid state contactors
- Rated operational voltage: up to 600VAC
- Rated operational current: up to 75AAC
- Control inputs: 0-20mA, 4-20mA, 12-20mA, 0-5V, 1-5V, 0-10V
- Local setting through external potentiometer
- Switching modes: phase angle or distributed full cycles (1, 4 or 16 full cycles)
- Soft start feature with selectable ramp time up to 5 seconds
- Integrated varistor protection on output
- Monitoring for SSR and load malfunction
- EMR alarm output for alarm indication
- 100kA short circuit current rating according to UL508
- DIN or panel mount
- RoHS compliant

Product Description

This series gives the possibility to control output power of 3-phase loads with an analog control input. The RGC2P is a 2-phase switching product whilst the RGC3P switches all 3 phases.


Input types cover a wide range of current and voltage ranges. Local setting by an external potentiometer is also possible. Switching modes cover phase angle control, distributed full cycle control and soft start for limiting inrush current of loads having a high temperature

coefficient, such as short wave infrared heaters.

Detection of mains loss, load loss, SSR short circuit and over-temperature is integrated in some models. Alarm condition is signalled through an EMR output and is visually indicated by the alarm LED. Additional LEDs indicate input and load status.

Specifications are at a surrounding temperature of 25°C unless otherwise specified.

Ordering Key **RGC 3 P 60 V 65 C1 D F M**

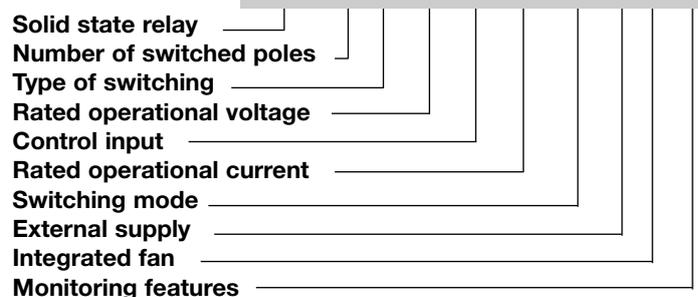

Ordering Key (Refer to page 4 for valid part numbers)

SSR with heatsink	Type of switching	Rated voltage (Ue), Blocking voltage	Control input ¹	Rated current/ pole @40°C ²	Switching mode	External supply (Us)	Features
RGC2: 2-pole switching + 1-pole direct	P: Proportional	60: 180 - 660VAC, 1200Vp	AA: 4-20mADC	20: 20AAC 25: 25AAC 30: 30AAC 40: 40AAC 65: 65AAC 75: 75AAC	E: Phase Angle	D: 24VAC/DC A: 90 - 250VAC	P: Integrated over temperature protection (OTP), mains loss with EMR alarm output F: Integrated fan M: Monitoring for Mains loss, Load loss, SSR short circuit, open circuit and OTP with EMR alarm output
RGC3: 3-pole switching			I: 0-20mADC 4-20mADC 12-20mADC		C1: 1 FC ON, 1FC OFF @ 50% input C4: 4 FC ON, 4FC OFF @ 50% input C16: 16 FC ON, 16FC OFF @ 50% input S: Soft Start S16: Soft Start + mode C16		

FC = Full Cycle

OTP = Over Temperature Protection

EMR = Electromechanical Relay

1. Input types I and V require an external supply Us


2. Refer to Derating Curves

Switching Modes

PHASE ANGLE switching - Mode E

The Phase angle switching mode works in accordance with the phase angle control principle. The power delivered to the load is controlled by the firing of the thyristors over each half supply cycle. The firing angle varies in relation to the input signal level which determines the output power to be delivered to the load.

Output with Phase angle switching mode @ 50% input level:

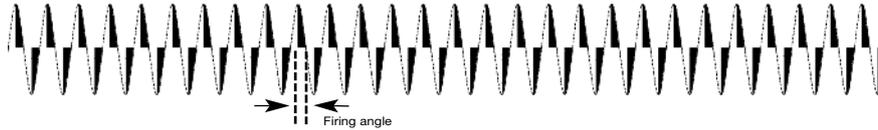

FULL CYCLE switching:

Single full cycle switching - Mode C1

In this switching mode only full cycles are switched. The number of full cycles delivered to the load over a specific time base is determined by the level of the analog input. The full cycles are DISTRIBUTED over this time base so as to ensure a fast and accurate control of the load. In mode C1, the switching resolution is 1 full cycle. Hence, @ an input level of 50% the output switching will be 1FC ON, 1FC OFF, @ 25% input 1FC ON, 3FC OFF and @ 75% input 1FC OFF, 3FC ON as shown in figure below.

Output with 1 FC switching mode @ 25% input level:



Output with 1 FC switching mode @ 50% input level:



Output with 1 FC switching mode @ 75% input level:



Output with 1 FC switching mode @ 100% input level:



Burst full cycle switching - Mode C4 and Mode C16

The modes C4 and C16 work on the same principle of the C1 mode and hence a number of full cycles are switched in accordance to the input level distributed over a specific time base. In the case of mode C4 the lowest resolution is 4 full cycles whilst for mode C16 it is 16 full cycles. These modes are suitable for loads which have a low thermal inertia.

Output with 4 FC switching mode @ 50% input level:



Output with 16 FC switching mode @ 50% input level:




Switching Modes (continued)

SOFT START switching:

In this mode the thyristor firing angle is gradually increased in order to apply the voltage (and current) to the load smoothly and thus reduce the start-up current of loads which have a high cold to hot resistance ratio such as short wave infrared heaters.


Soft start with digital input - Mode S

On power up, the RGC3P60V..S.. performs a soft start as soon as a control input is applied. The ramp time can be set to a maximum of 5 seconds through an onboard potentiometer. After the ramp is completed, full cycles are delivered to the output as long as a control voltage (between 5 - 10V) is present on terminals A1-A4. Soft start is not performed every time the control input is applied but only in the cases where firing has been cut off for more than 5 seconds. If for some reason ramping is stopped before ramp completion, a start is assumed to have been performed and hence the 5 seconds count start once ramping is stopped.

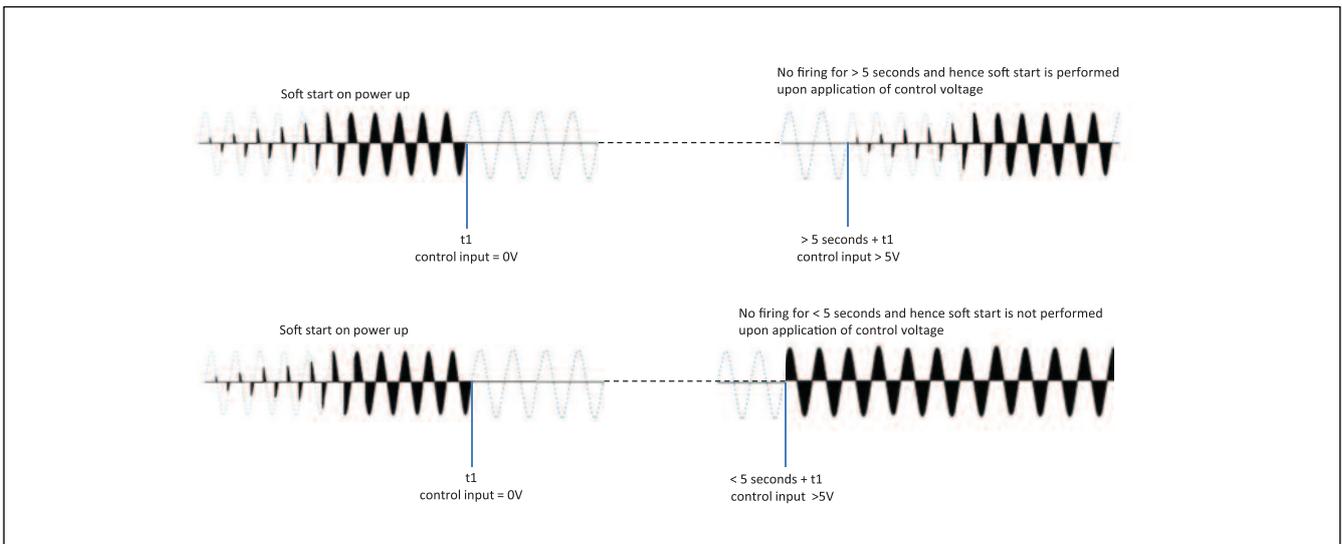

Soft start with analog input - Mode S16

This switching mode is a combination of 2 switching modes described above and hence soft start with mode S and full cycle control with mode C16. The RGC3P60V..S16 switching mode works on the principle of the mode C16 but on power up soft starting is performed to limit inrush currents loads which have a low resistance when cold. After the soft start is completed, where ramping time can be set to maximum of 5 seconds through an onboard potentiometer, the mode C16 comes into affect. Full cycles are thus delivered to the load in accordance to the input level. Soft starting is performed on power up and in case firing has been cut in the previous 5 seconds. If for some reason ramping is stopped before ramp completion, a start is assumed to have been performed and hence the 5 seconds count start once ramping is stopped.

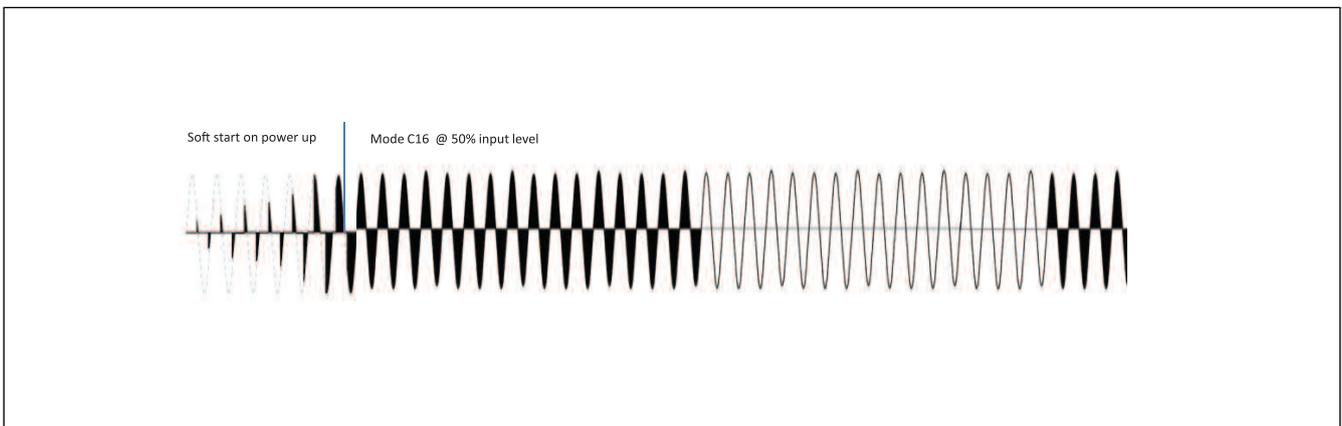

Selection Guide: RGC2P

Output voltage, Ue	Control input	Switching mode	Features	External supply, Us	Connection Control/Power	Rated operational current @ 40°C			
						15AAC/pole (1,800 A ² s)	25AAC/pole (1,800 A ² s)	40AAC/pole (6,600 A ² s)	75AAC/pole (15,000 A ² s)
600VAC	AA 4-20mA	C1	-	-	Screw/Screw	RGC2P60AA15C1	RGC2P60AA25C1	-	-
					Screw/Box	-	-	RGC2P60AA40C1	-
	I 0-20mA 4-20mA	C1	Monitoring	24VDC/AC	Box/Screw	-	RGC2P60I25C1DM	-	-
					Box/Box	-	-	RGC2P60I40C1DM	RGC2P60I75C1DFM
					90-250VAC	Box/Box	-	-	-
	12-20mA	C4	Monitoring	24VDC/AC	Box/Screw	-	RGC2P60I25C4DM	-	-
					Box/Box	-	-	RGC2P60I40C4DM	RGC2P60I75C4DFM
					90-250VAC	Box/Box	-	-	-
	V 0-10V 0-5V 1-5V	C1	Monitoring	24VDC/AC	Box/Screw	-	RGC2P60V25C1DM	-	-
					Box/Box	-	-	RGC2P60V40C1DM	RGC2P60V75C1DFM
				90-250VAC	Box/Box	-	-	-	RGC2P60V75C1AFM
					Box/Box	-	-	-	RGC2P60V75C1AFM

Selection Guide: RGC3P

Output voltage, Ue	Control input	Switching mode	Features	External supply, Us	Connection Control/Power	Rated operational current @ 40°C					
						20AAC/pole (1,800 A ² s)	30AAC/pole (6,600 A ² s)	65AAC/pole (15,000 A ² s)			
600VAC	AA 4-20mA	E	-	-	Screw/Screw	RGC3P60AA20E	-	-			
					Screw/Box	-	RGC3P60AA30E	-			
	C1	-	-	-	Screw/Screw	RGC3P60AA20C1	-	-			
					Screw/Box	-	RGC3P60AA30C1	-			
	I 0-20mA 4-20mA 12-20mA	E	OTP	24VDC/AC	Box/Screw	RGC3P60I20EDP	-	-			
					Box/Box	-	RGC3P60I30EDP	RGC3P60I65EDFP			
					90-250VAC	Box/Screw	-	-	-		
					Box/Box	-	RGC3P60I30EAP	RGC3P60I65EAFP			
					C1	Monitoring	24VDC/AC	Box/Screw	RGC3P60I20C1DM	-	-
								Box/Box	-	RGC3P60I30C1DM	RGC3P60I65C1DFM
		90-250VAC	Box/Screw	Box/Box	-	-	-	-			
					-	RGC3P60I30C1AM	RGC3P60I65C1AFM				
		C4	Monitoring	24VDC/AC	Box/Screw	RGC3P60I20C4DM	-	-			
					Box/Box	-	RGC3P60I30C4DM	RGC3P60I65C4DFM			
					90-250VAC	Box/Screw	-	-	-		
					Box/Box	-	RGC3P60I30C4AM	RGC3P60I65C4AFM			
	C16				Monitoring	24VDC/AC	Box/Screw	RGC3P60I20C16DM	-	-	
							Box/Box	-	RGC3P60I30C16DM	RGC3P60I65C16DFM	
	90-250VAC	Box/Screw	Box/Box	-	-	-	-				
				-	RGC3P60I30C16AM	RGC3P60I65C16AFM					
	V 0-10V 0-5V 1-5V	E	OTP	24VDC/AC	Box/Screw	RGC3P60V20EDP	-	-			
					Box/Box	-	RGC3P60V30EDP	RGC3P60V65EDFP			
					90-250VAC	Box/Screw	-	-	-		
					Box/Box	-	RGC3P60V30EAP	RGC3P60V65EAFP			
					C1	Monitoring	24VDC/AC	Box/Screw	RGC3P60V20C1DM	-	-
								Box/Box	-	RGC3P60V30C1DM	RGC3P60V65C1DFM
		90-250VAC	Box/Screw	Box/Box	-	-	-	-			
					-	RGC3P60V30C1AM	RGC3P60V65C1AFM				
		C4	Monitoring	24VDC/AC	Box/Screw	RGC3P60V20C4DM	-	-			
					Box/Box	-	RGC3P60V30C4DM	RGC3P60V65C4DFM			
					90-250VAC	Box/Screw	-	-	-		
					Box/Box	-	RGC3P60V30C4AM	RGC3P60V65C4AFM			
	C16				Monitoring	24VDC/AC	Box/Screw	RGC3P60V20C16DM	-	-	
							Box/Box	-	RGC3P60V30C16DM	RGC3P60V65C16DFM	
	90-250VAC	Box/Screw	Box/Box	-	-	-	-				
				-	RGC3P60V30C16AM	RGC3P60V65C16AFM					
S16	Monitoring	24VDC/AC	Box/Screw	RGC3P60V20S16DM	-	-					
			Box/Box	-	RGC3P60V30S16DM	RGC3P60V65S16DFM					
			90-250VAC	Box/Screw	-	-	-				
			Box/Box	-	RGC3P60V30S16AM	RGC3P60V65S16AFM					
			V	S	Monitoring	24VDC/AC	Box/Screw	RGC3P60V20SDM	-	-	
							Box/Box	-	RGC3P60V30SDM	RGC3P60V65SDFM	

General Specifications

	RGC..AA..	RGC..I..	RGC..V..
Latching voltage (across each pole L-T)	≤20V		
Operational frequency range	45 to 65Hz		
Power factor	> 0.7 @ rated voltage		
Output Power	0 to 100%		
Touch Protection	IP20		
CE marking	Yes		
Pollution degree	2 (non-conductive pollution with possibilities of condensation)		
Over-voltage category	III (fixed installations)		
LED status indication			
Control ON	Green <4mA, flashing 0.5s ON, 0.5s OFF >4mA, intensity varies with input	Green Full intensity	Green Full intensity
Supply ON	n/a	Green Flashing 0.5s ON, 0.5s OFF	Green Flashing 0.5s ON, 0.5s OFF
Load ON	n/a	Yellow ON according to load status	Yellow ON according to load status
Alarm ON	Green, flashing ³	Red, flashing ³	Red, flashing ³
Isolation			
Input & Output to Case	4000Vrms	4000Vrms	4000Vrms
Input to Output	2500Vrms	2500Vrms	2500Vrms
External supply to input Us to A1, A2, A3, A4, A5, Uf, 11, 12, 14, C1, C2	n/a	1500Vrms	1500Vrms
External supply & input to EMR Us, A1, A2, A3, A4, A5, Uf, C1, C2 to 11, 12, 14	n/a	1500Vrms	1500Vrms

3: Refer to LED Indications

Output Voltage Specifications

Operational voltage range Line to line voltage, L1/L2/L3	180-660 VAC
Permissible voltage unbalance	≤10% between L1/L2/L3
Blocking voltage	1200Vp
Leakage current @ rated voltage	≤5mAAC per pole
Internal Varistors (across each pole)	Yes

Output Specifications: RGC2

	RGC2..15	RGC2..25	RGC2..40	RGC2..75
Rated operational current per pole ⁴				
AC-51 @ Ta=25°C	15 AAC	32 AAC	50 AAC	85 AAC
AC-51 @ Ta=40°C	15 AAC	27 AAC	40 AAC	75 AAC
AC-55b @ Ta=40°C ⁵	tbd	tbd	tbd	tbd
Minimum operational current	500 mAAC	500 mAAC	1AAC	1 AAC
Number of starts	tbd	tbd	tbd	tbd
Rep. Overload Current PF = 0.7 UL508: T=40°C, tON=1s, tOFF=9s, 50cycles	61 AAC	61 AAC	107 AAC	154 AAC
Maximum transient surge current (I _{tsm}), t=10ms	600 Ap	600 Ap	1150 Ap	1750 Ap
I ² t for fusing (t=10ms), minimum	1800 A ² s	1800 A ² s	6600 A ² s	15000 A ² s
Critical dv/dt (@ T _j init = 40°C)	1000 V/us	1000 V/us	1000 V/us	1000 V/us

4: Refer to Derating Curves

5: Overload profile for AC-55b, Ie: AC-55b: $6x I_e - 0.2: 50 - x$, where x = no. of starts

Output Specifications: RGC3

	RGC3..20	RGC3..30	RGC3..65
Rated operational current per pole ⁴			
AC-51 @ Ta=25°C	25AAC	37AAC	71AAC
AC-51 @ Ta=40°C	20AAC	30AAC	66AAC
AC-55b @ Ta=40°C ⁵	tbd	tbd	tbd
Minimum operational current	500 mACC	1AAC	1 AAC
Number of starts	tbd	tbd	tbd
Rep. Overload Current PF = 0.7 UL508: T=40°C, tON=1s, tOFF=9s, 50cycles	61 AAC	107 AAC	154 AAC
Maximum transient surge current (I _{tsm}), t=10ms	600 Ap	1150 Ap	1750 Ap
I ² t for fusing (t=10ms), minimum	1800 A ² s	6600 A ² s	15000 A ² s
Critical dv/dt (@ T _j init = 40°C)	1000 V/us	1000 V/us	1000 V/us

4: Refer to Derating Curves

5: Overload profile for AC-55b, Ie: AC-55b: $6x I_e - 0.2: 50 - x$, where x = no. of starts




Input Specifications

		RGC..AA..	RGC..I..	RGC..V..
Control input		4 - 20mADC	0 - 20mADC 4 - 20mADC 12 - 20mADC	0 - 5VDC 1 - 5VDC 0 - 10VDC 5 - 10 VDC
	RGC3P..S			
Drop out voltage	RGC3P..S	-	-	< 4VDC
External potentiometer input		n/a	n/a	10K ohms (terminal A1, A3, A5)
Maximum initialisation time		250ms	250ms	250ms
Response time (Input to Output)	RGC..E, S	2 half cycles	2 half cycles	2 half cycles
	RGC..C1, C4, C16, S16	3 half cycles	3 half cycles	3 half cycles
Input impedance		n/a	<250 ohms	100k ohms
Linearity, Output resolution		Refer to Transfer Characteristics section		
Voltage drop		< 10VDC @ 20mA	n/a	n/a
Reverse protection		Yes	Yes	Yes
Maximum allowable input current		50mA for max. 30 sec.	50mA for max. 30 sec.	n/a
Input protection vs. surges		Yes	Yes	Yes
Overvoltage protection		n/a	n/a	up to 24VDC

Note: Control input serial connection of multiple units is ONLY possible for:

1. RGC..AA versions, and
2. the versions that require an AC external supply and hence the RGC..I..AM, RGC..I..AFM, RGC..I..AP and RGC..I..AFP models


Transfer Characteristics

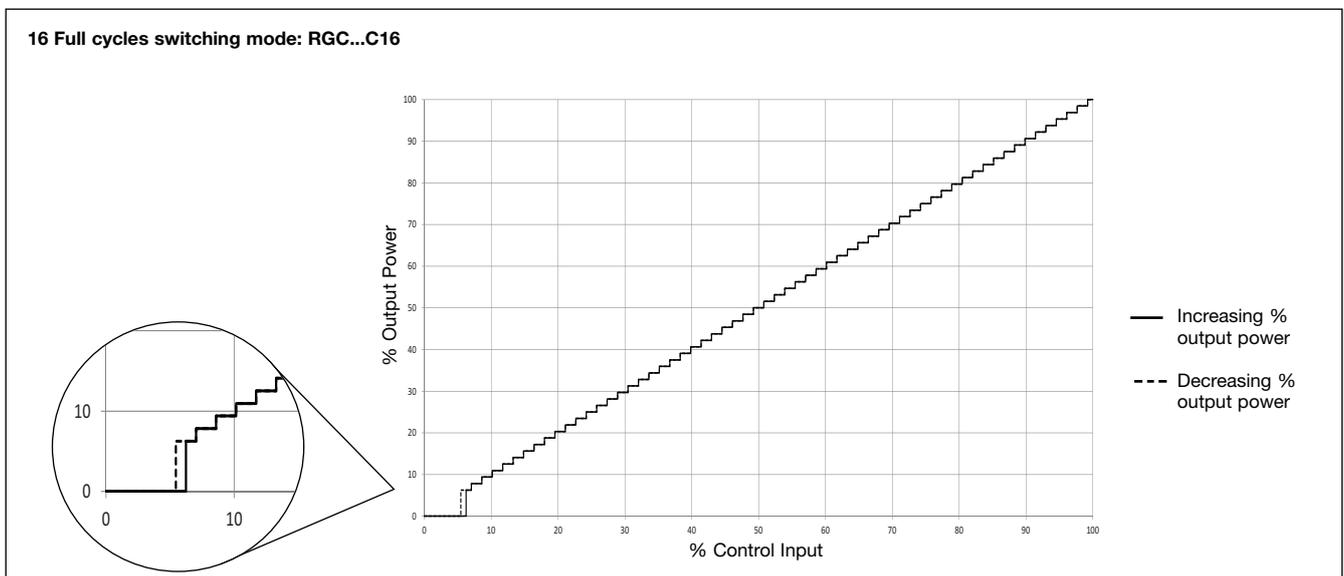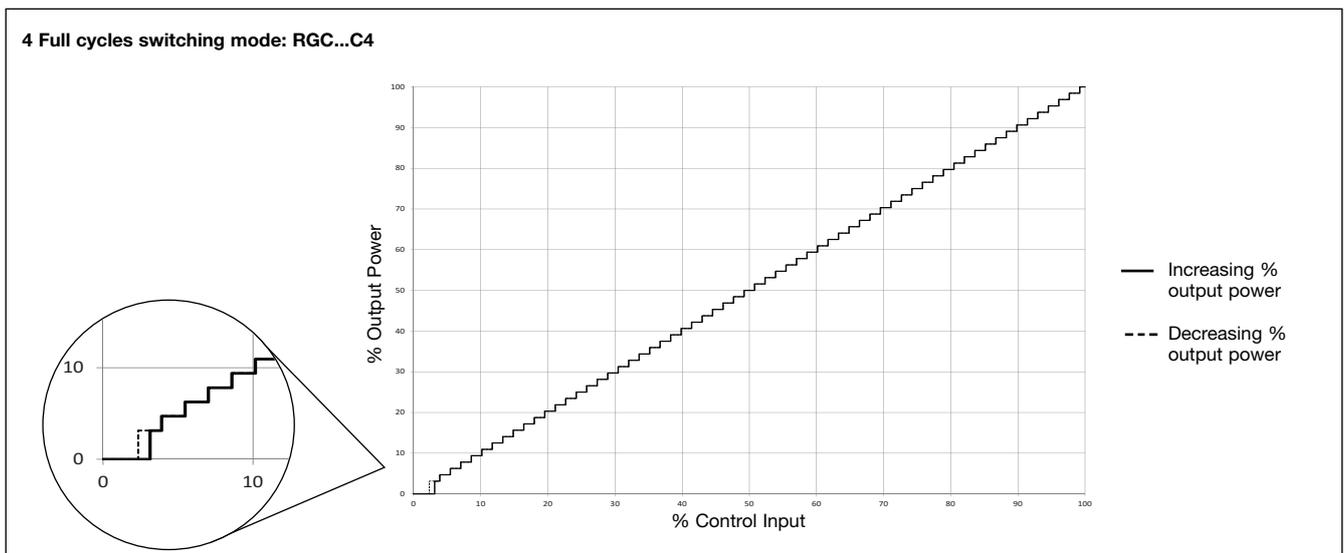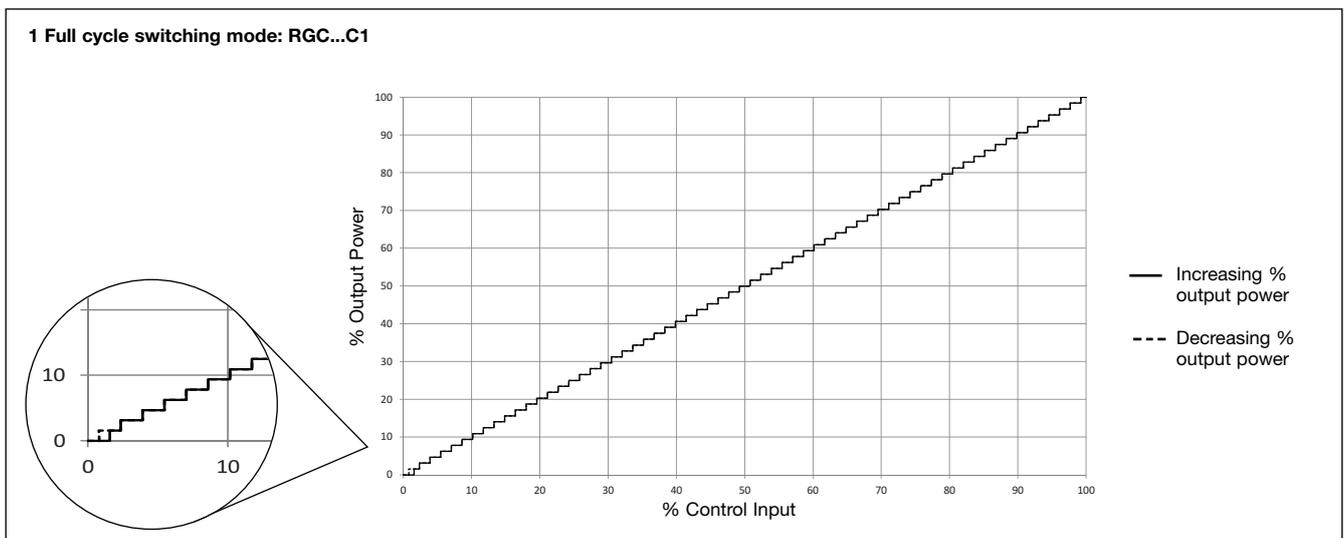


Transfer Characteristics

Phase Angle switching mode: RGC3P..E

3-phase, 3-wire systems

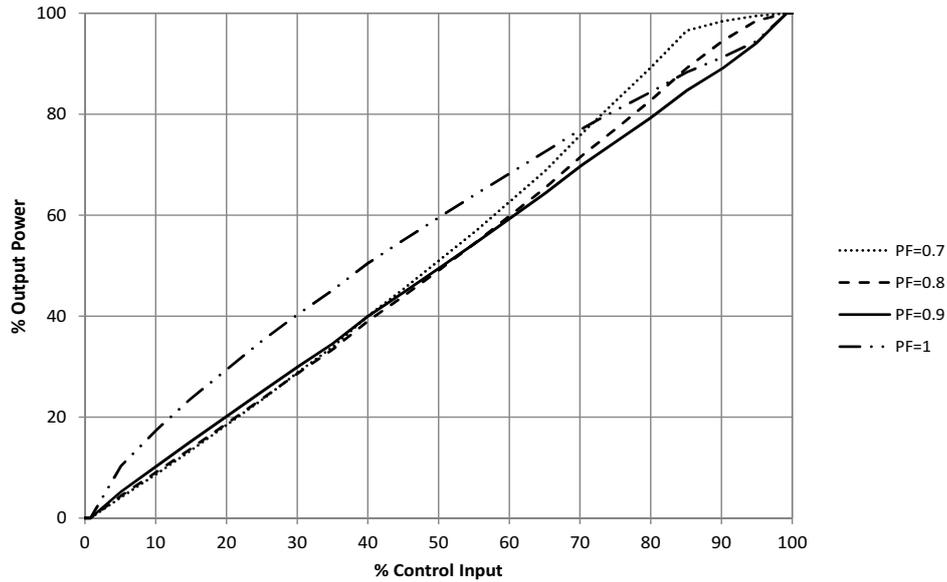

3-phase, 4-wire systems

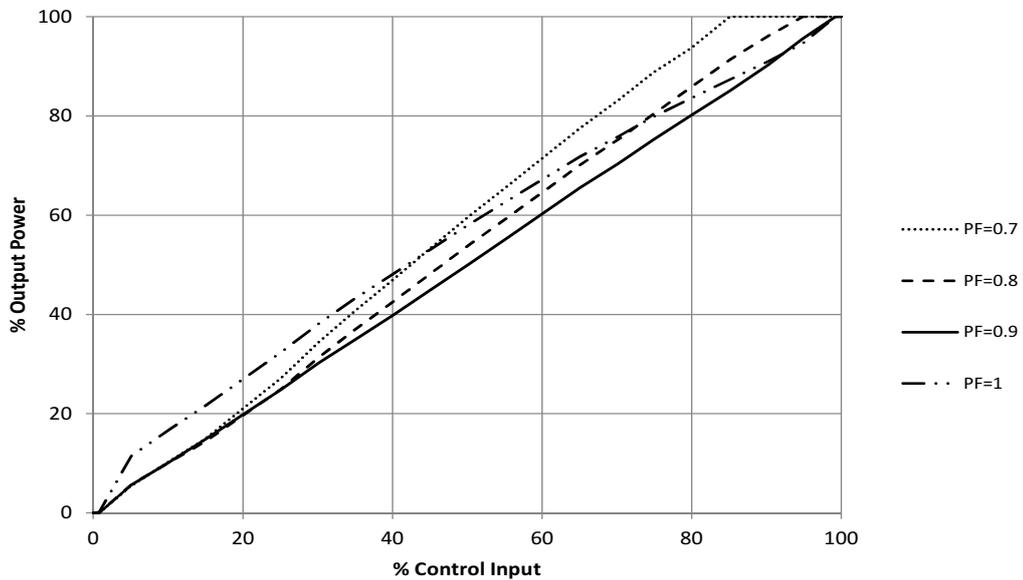


Supply Specifications (Us)


	RGC..D..	RGC..A..
Supply voltage range	24VDC, -15% / +20% 24VAC, -15% / +15%	90-250VAC
Overtoltage protection	up to 32VDC/AC for 30 seconds	n/a
Reverse protection	Yes	n/a
Surge protection	Yes, integrated	Yes
Max. supply current		
no fan, RGC..P, RGC..M	90mA	30mA
with fan, RGC..FP, RGC..FM	175mA	60mA

Alarm Specifications (12, 14, 11)


	RG..P RG..M
Output type	EMR, 1 Form C Normally closed (12-11) Normally open (14-11)
Contact rating	2A @ 250VAC / 30VDC
Isolation between open contacts	1000VAC




Output Power Dissipation

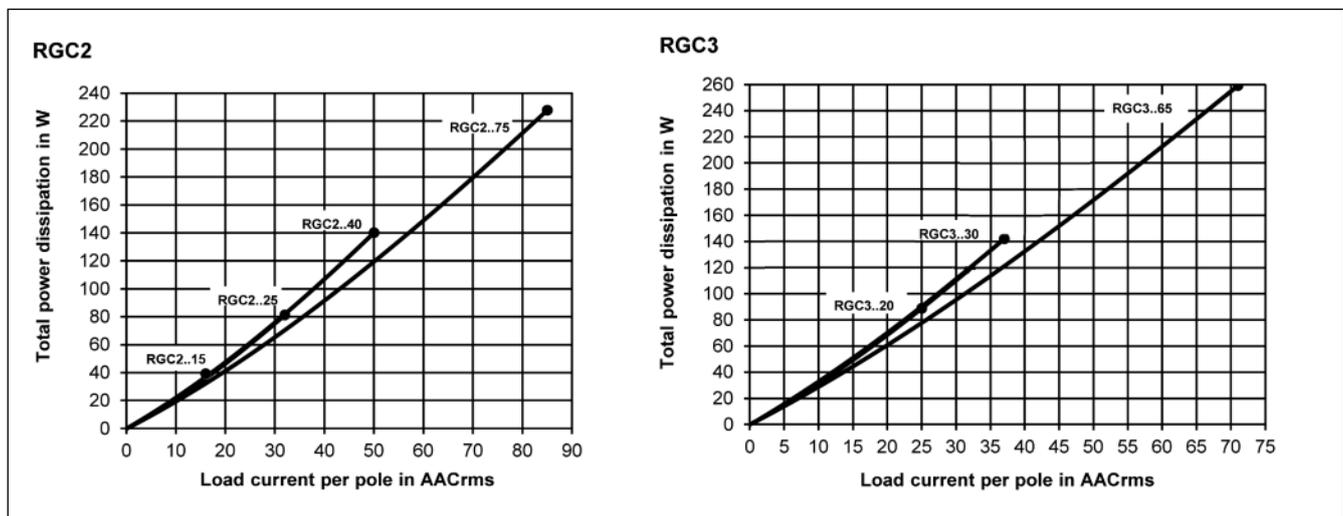

Current Derating

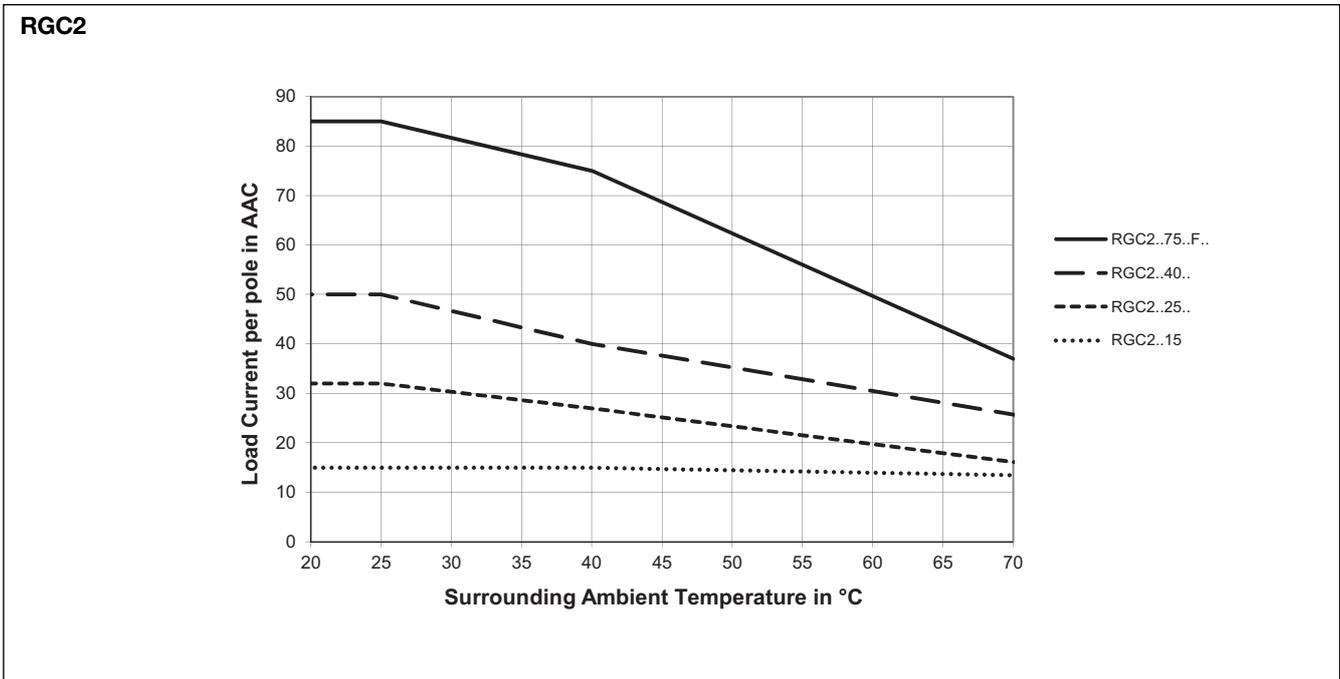

Note: Versions that utilise 24VAC external supply (Us) are limited to a maximum operating temperature of 60°C (140°F)

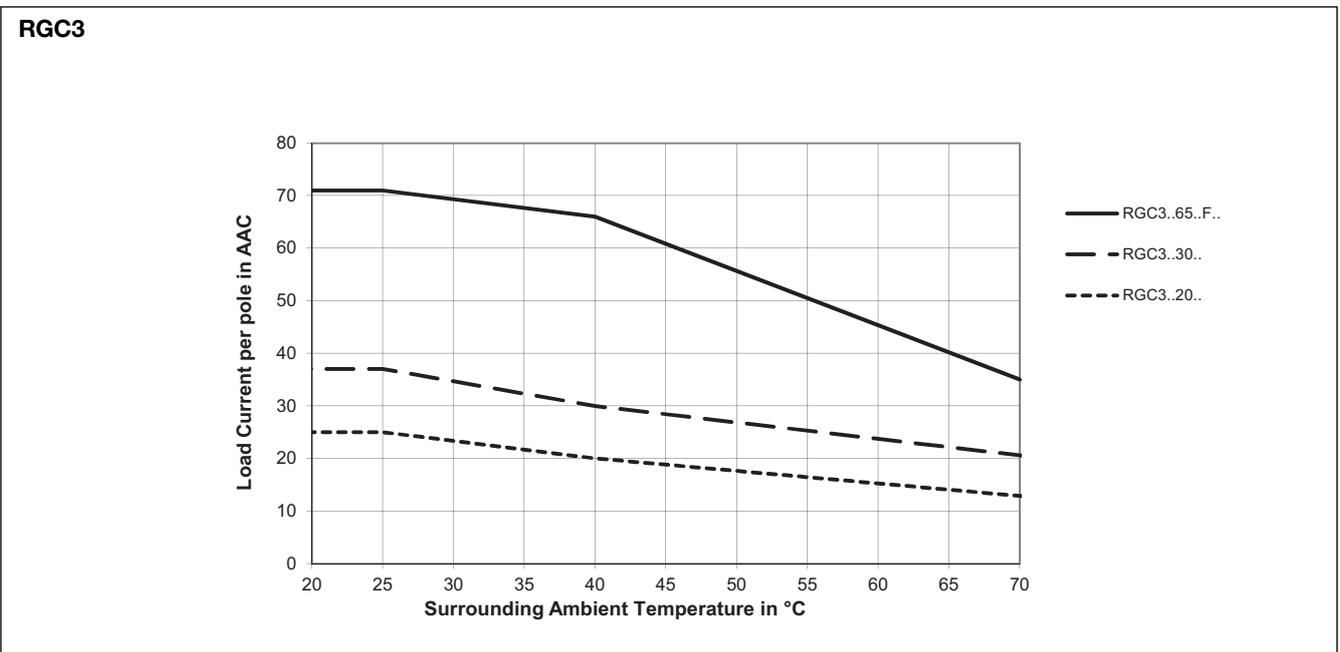

Note: Versions that utilise 24VAC external supply (Us) are limited to a maximum operating temperature of 60°C (140°F)

Agency Approvals and Conformance

Conformance



EN/IEC 60947-4-3

Agency Approvals

UL Listed (E172877), UL508
cUL Listed (E172877),
C22.2 No.14-10

Short Circuit Current rating

100kArms, UL508

Electromagnetic Compatibility

EMC immunity	EN/IEC 61000-6-2	Electrical fast transient (Burst) immunity	EN/IEC 61000-4-4
Electrostatic discharge (ESD) immunity	EN/IEC 61000-4-2	Output: 2kV, 5kHz	Performance Criteria 1
Air discharge, 8kV	Performance Criteria 2	Input : 1kV, 5kHz	Performance Criteria 1
Contact, 4kV	Performance Criteria 2	(A1, A2, A3, A4, A5)	
Electrical surge immunity	EN/IEC 61000-4-5	Signal : 1kV, 5kHz	Performance Criteria 1
Output, line to line, 1kV	Performance Criteria 2	(Us, 11, 12, 14)	
Output, line to earth, 2kV	Performance Criteria 2	Radiated radio frequency immunity	EN/IEC 61000-4-3
RGC..AA..	Performance Criteria 1	10V/m, 80 - 1000MHz	Performance Criteria 1
A1, A2, line to line, 500V	Performance Criteria 1	10V/m, 1.4 - 2.0GHz	Performance Criteria 1
A1, A2, line to earth, 500V	Performance Criteria 1	3V/m, 2.0 - 2.7GHz	Performance Criteria 1
RGC..I.., RGC..V..		Conducted radio frequency immunity	EN/IEC 61000-4-6
A1, A2, A3, A4, A5		10V/m, 0.5 - 80MHz	Performance Criteria 1
Line to earth, 1kV	Performance Criteria 2	Voltage dips	EN/IEC 61000-4-11
Us+, Us-	Performance Criteria 2	0% for 0.5/1cycle	Performance Criteria 2
Line to line, 500V	Performance Criteria 2	40% for 10 cycles	Performance Criteria 2
Line to earth, 500V	Performance Criteria 2	70% for 250 cycles	Performance Criteria 2
Us ~, 11, 12, 14		Voltage interruptions immunity	EN/IEC 61000-4-11
Line to line, 1kV	Performance Criteria 2	0% for 5000ms	Performance Criteria 2
Line to earth, 2kV	Performance Criteria 2		
EMC emission	EN/IEC 61000-6-4	Radio interference field emission (radiated)	EN/IEC 55011
Radio interference voltage emission (conducted)	EN/IEC 55011	30-1000MHz	Class A (Industrial)
0.15-30MHz	Class A (on input & external supply)		

Note:


- Control input lines must be installed together to maintain products susceptibility to Radio Frequency Interference.
- Use of AC solid state relays may according to the application and the load current, cause conducted radio interferences. Use of mains filters may be necessary for cases where the user must meet E.M.C requirements. The capacitor values given inside the filtering specification tables should be taken only as indications, the filter attenuation will depend on the final application.
- This product has been designed for Class A equipment. Use of this product in domestic environments may cause radio interference, in which case the user may be required to employ additional mitigation methods.
- Surge tests on RGC..A, RGC..A..A.. models were carried out with the signal line impedance network. In case the line impedance is less than 40Ω, it is suggested that AC supply is provided through a secondary circuit where the short circuit limit between conductors and ground is 1500VA or less.
- A deviation of one step in the distributed full cycle models and up to 1.5% Full Scale Deviation in phase angle models is considered to be within PC1 criteria.

- Performance Criteria 1 (Performance Criteria A): No degradation of performance or loss of function is allowed when the product is operated as intended.
- Performance Criteria 2 (Performance Criteria B): During the test, degradation of performance or partial loss of function is allowed. However, when the test is complete the product should return operating as intended by itself.
- Performance Criteria 3 (Performance Criteria C): Temporary loss of function is allowed, provided the function can be restored by manual operation of the control.


Environmental Specifications

Operating temperature	-40°C to +70°C (-40°F to +158°F)	UL flammability rating	UL 94 V0
Us=24VAC	-40°C to +60°C (-40°F to +140°F)	(for plastic)	
Storage temperature	-40°C to +100°C (-40°F to +212°F)	Installation altitude	0 - 1000m. Above 1000m derate linearly by 1% of FLC per 100m up to maximum of 2000m
RoHS (2002/95/EC)	Compliant		
Impact resistance	15/11 g/ms	Weight	
(EN50155, EN61373)		RGC2..15, RGC2..25 (M)	approx. 600g (660g)
Vibration resistance	2g per axis	RGC3..20 (M or P)	approx. 600g (670g)
(2-100Hz, IEC60068-2-26, EN50155, EN61373)		RGC2..40, RGC3..30 (M or P)	approx. 840g (920g)
Relative humidity	95% non condensing @ 40°C	RGC2..75, RGC3..65	approx. 990g


Terminals Layout

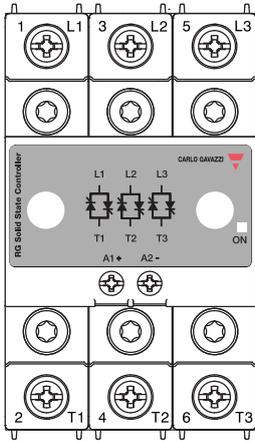


RGC2P..AA15, RGC2P..AA25, RGC2P..AA40
RGC3P..AA20, RGC3P..AA30

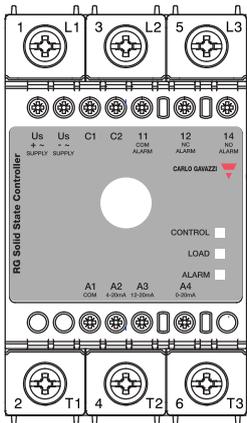


RGC2P..I25, RGC2P..I40
RGC3P..I20, RGC3P..I30

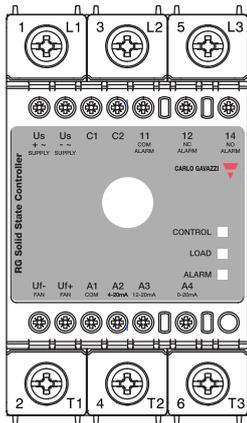


RGC2P..I75
RGC3P..I65

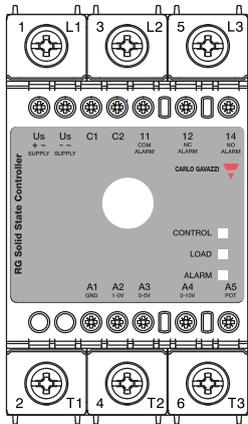


RGC2P..V25, RGC2P..V40
RGC3P..V20, RGC3P..V30

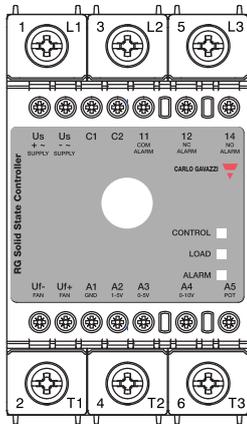

RGC2P..V75
RGC3P..V65

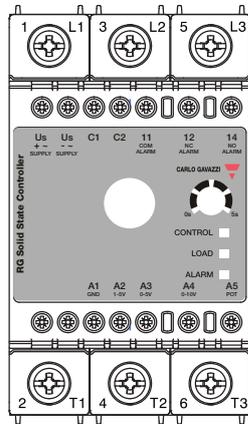

RGC3P..V20S.., RGC3P..V30S..

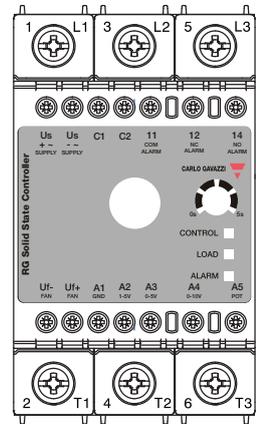



RGC3P..V65S..

Terminals Labelling:

- 1/L1, 2/L2, 3/L3: Line connections
- 2/T1, 4/T2, 6/T3: Load connections
- A1 , A2: Control input
4-20mA (RGC..AA.), 4-20mA (RGC..I.), 1-5V (RGC..V.)
- A1 , A3: Control input,
12-20mA (RGC..I.), 0-5V (RGC..V.)
- A1 , A4: Control input
0-20mA (RGC..I.), 0-10V (RGC..V.)
- A5: External Potentiometer input (RGC..V.)
- Us (+, -): External supply, positive signal (RGC..DM, DFM, DP, DFP),
AC signal (RGC..AM, AFM, AP, AFP)
- Us (-, ~): External supply, ground (RGC..DM, DFM, DP, DFP),
AC signal (RGC..AM, AFM, AP, AFP)
- C1, C2: Configuration mode selection
External short link between C1 & C2 is
required ONLY in case of 4-wire, 3-phase systems
- Uf+ : Fan supply positive signal
- Uf - : Fan supply ground

Connections to Uf-, Uf+ are readily terminated by manufacturer. No other connection is required by end user.




Dimensions

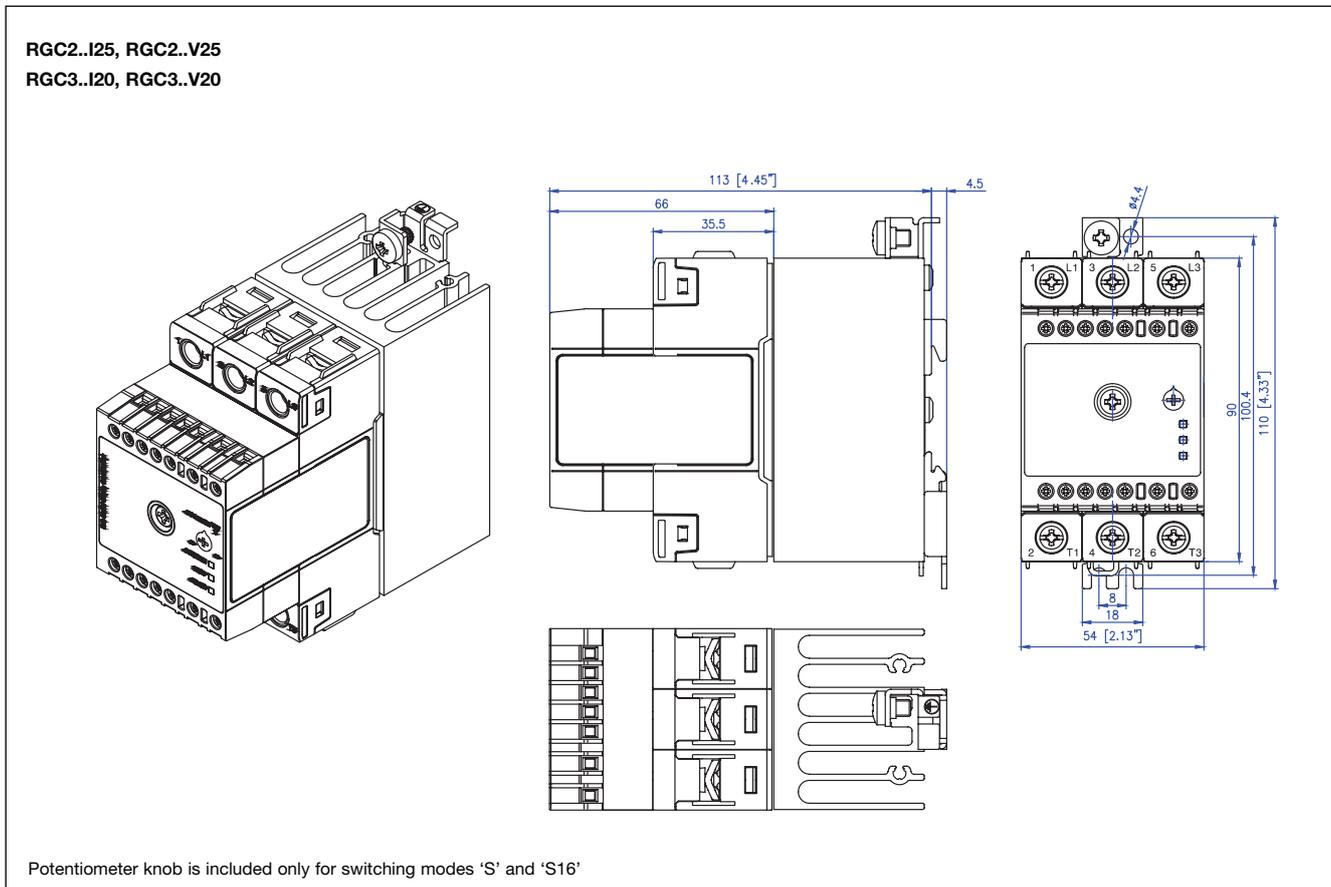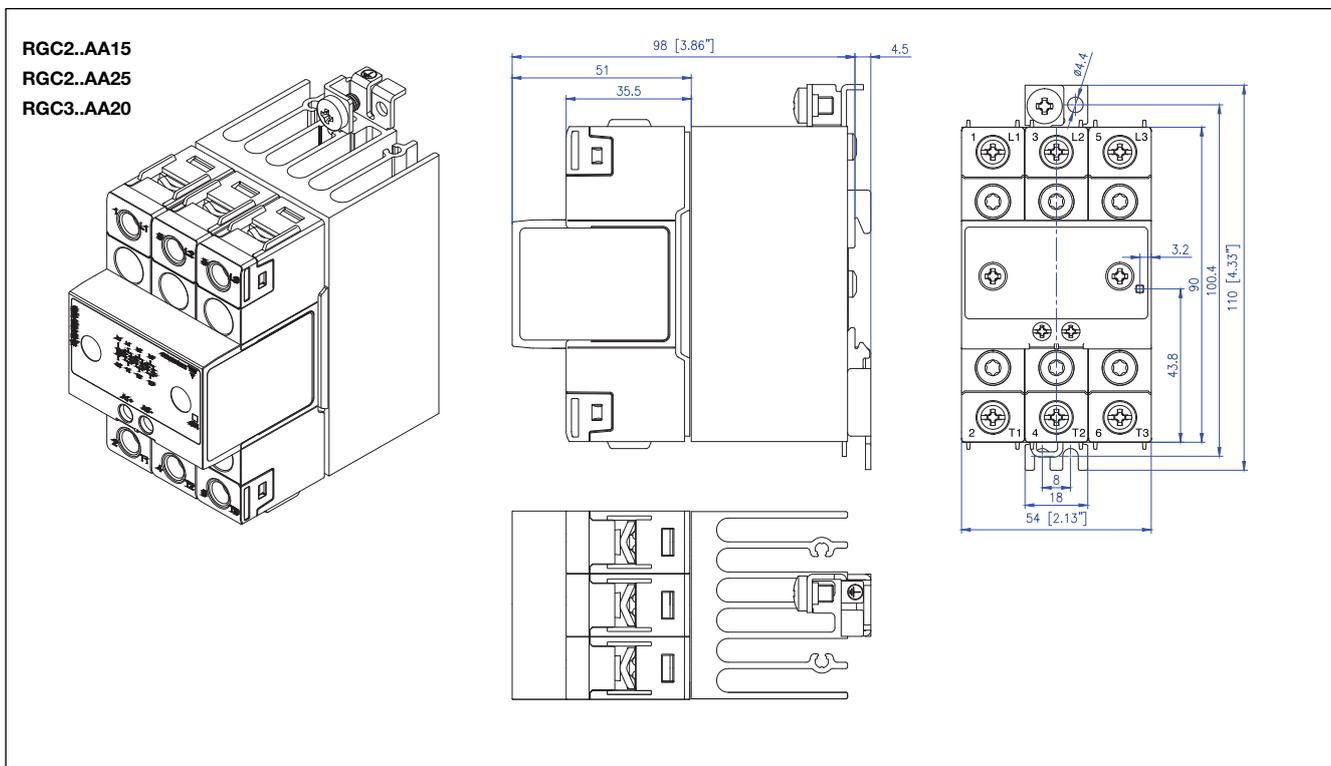




Dimensions in mm. Housing width tolerance +0.5mm, - 0mm as per DIN43880.
 All other tolerances ±0.5mm

Dimensions

RGC2..AA40
RGC3..AA30

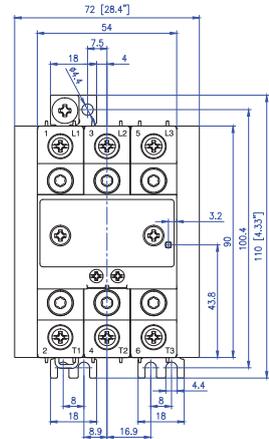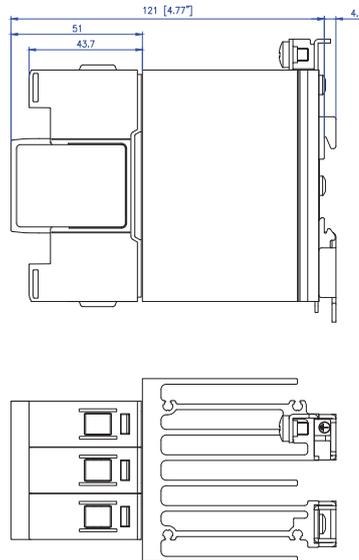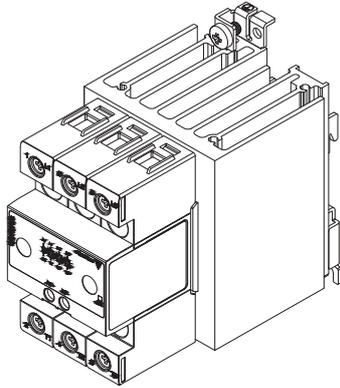

RGC2..I40, RGC2..V40
RGC3..I30, RGC3..V30

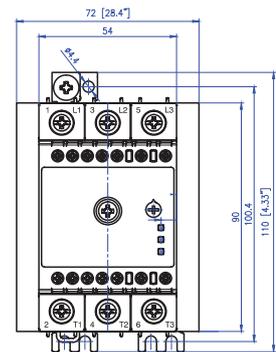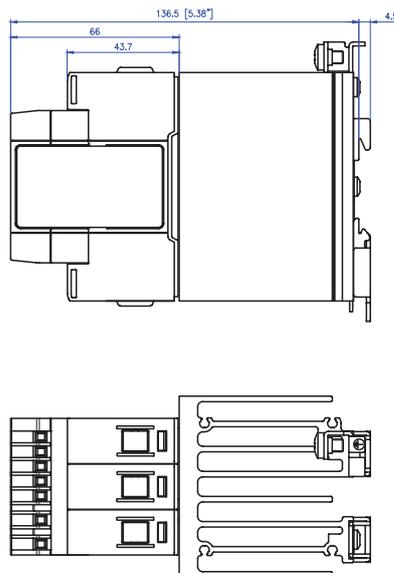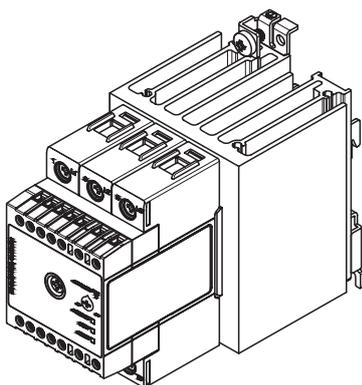


Potentiometer knob is included only for switching modes 'S' and 'S16'

Dimensions in mm. Housing width tolerance +0.5mm, - 0mm as per DIN43880.
All other tolerances ±0.5mm

Dimensions

RGC2..I75, RGC2..V75
RGC3..I65, RGC3..V65

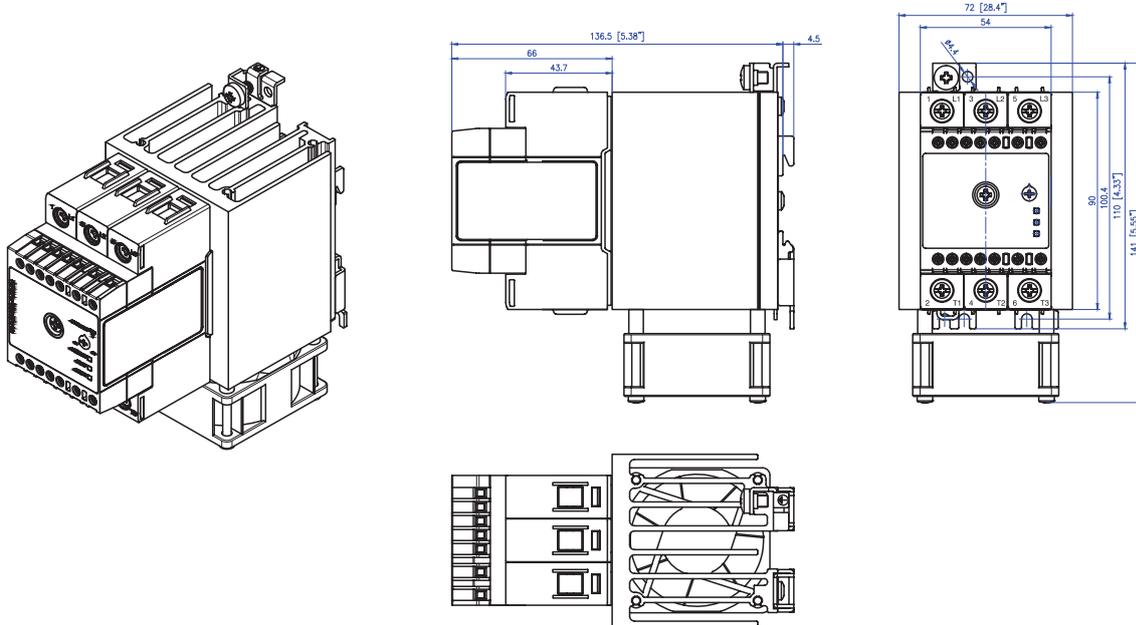

Potentiometer knob is included only for switching modes 'S' and 'S16'

Dimensions in mm. Housing width tolerance +0.5mm, - 0mm as per DIN43880.
All other tolerances ± 0.5 mm

Connection Specifications

POWER CONNECTIONS

Use 75°C copper (Cu) conductors

1/L1, 3/L2, 5/L3, 2/T1, 4/T2, 6/T3

RGC2..15, RGC2..25
RGC3..20RGC2..40, RGC2..75
RGC3..30, RGC3..65

Stripping length (X)


12mm

11mm

Connection type

M4 screw with captivated washer

M5 screw with box clamp

Rigid (solid & stranded)
UL/cUL rated data2x 2.5 - 6.0 mm²
2x 14 - 10 AWG1x 2.5 - 6.0 mm²
1x 14 - 10 AWG1x 2.5 - 25 mm²
1x 14 - 3 AWGFlexible with end
sleeve2x 1.0 - 2.5 mm²
2x 2.5 - 4.0 mm²
2x 18 - 14 AWG
2x 14 - 12 AWG1x 1.0 - 4.0 mm²
1x 18 - 12 AWG1x 2.5 - 16 mm²
1x 14 - 6 AWGFlexible without end
sleeve2x 1.0 - 2.5 mm²
2x 2.5 - 6.0 mm²
2x 18 - 14 AWG
2x 14 - 10 AWG1x 1.0 - 6.0 mm²
1x 18 - 10 AWG1x 4.0 - 25 mm²
1x 12 - 3 AWG

Torque specification

Pozidriv 2
UL: 2Nm (17.7 lb-in)
IEC: 1.5-2.0Nm (13.3-17.7 lb-in)Pozidriv 2
UL: 2.5Nm (22 lb-in)
IEC: 2.5-3.0Nm (22-26.6 lb-in)Aperture for
termination lug

12.3mm

n/a

Protective Earth (PE)
connection

M5, 1.5Nm (13.3 lb-in)

Not provided with SSR. PE connection required when product is intended to be used in Class 1 applications according to EN/IEC 61140

CONTROL CONNECTIONS

Use 75°C copper (Cu) conductors

A1, A2

A1, A2, A3, A4, A5 Us, Uf, 11, 12, 14, C1, C2

RGC..AA..

RGC..I.., RGC..V..



Stripping length (X)


8mm

8 mm

Connection type

M3 screw with captivated washer



M3 screw with box clamp

Rigid (solid & stranded)
UL/cUL rated data2x 0.5 - 2.5 mm²
2x 18 - 12 AWG1x 0.5 - 2.5 mm²
1x 18 - 12 AWG1x 1.0 - 2.5 mm²
1x 18 - 12 AWGFlexible with end
sleeve2x 0.5 - 2.5 mm²
2x 18 - 12 AWG1x 0.5 - 2.5 mm²
1x 18 - 12 AWG1x 0.5 - 2.5 mm²
1x 20 - 12 AWG


Torque specification

Pozidriv 1
UL: 0.5Nm (4.4 lb-in)
IEC: 0.5-0.6Nm (4.4-5.3 lb-in)Pozidriv 1
UL: 0.5Nm (4.4 lb-in)
IEC: 0.4-0.5Nm (3.5-4.4 lb-in)


Connection Diagram

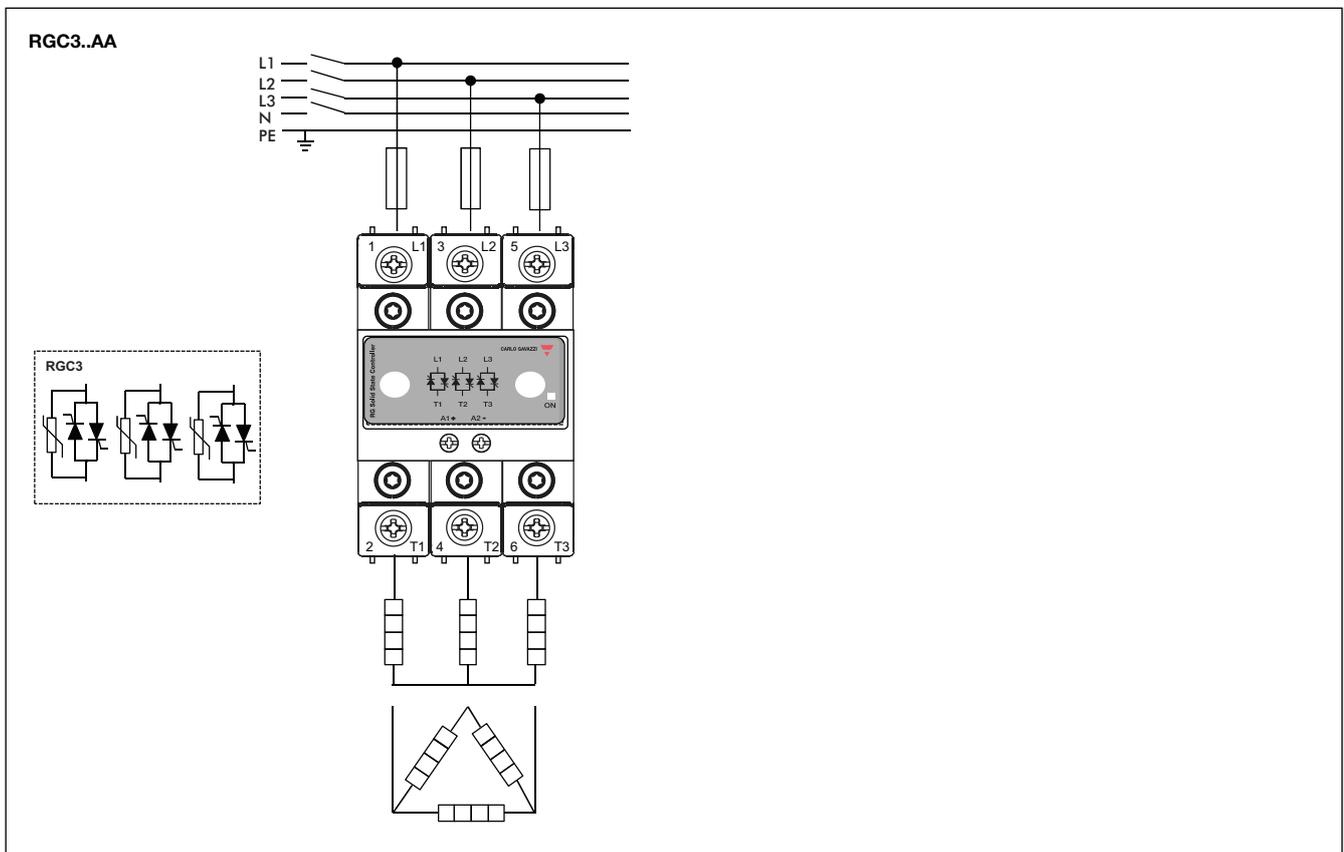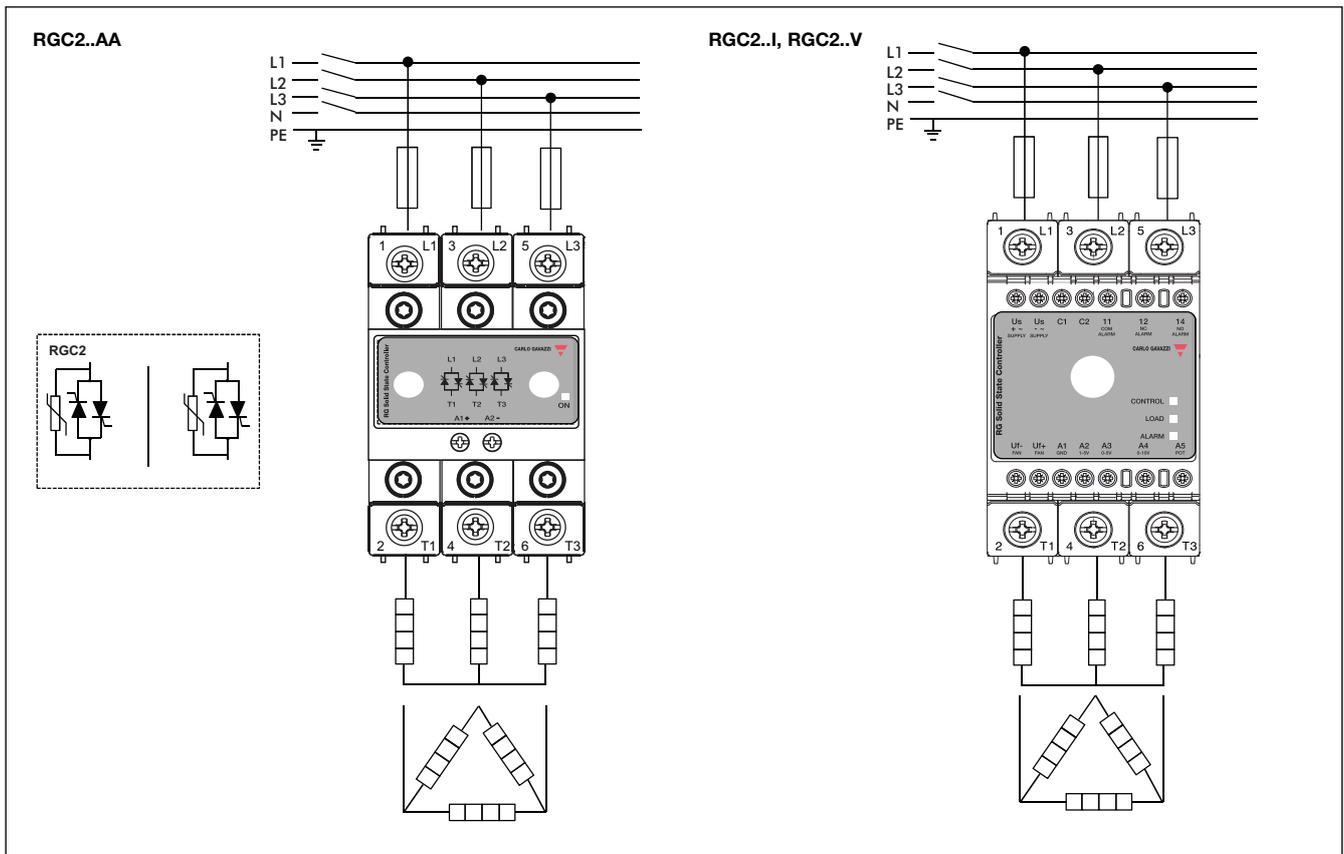

Connection Diagram

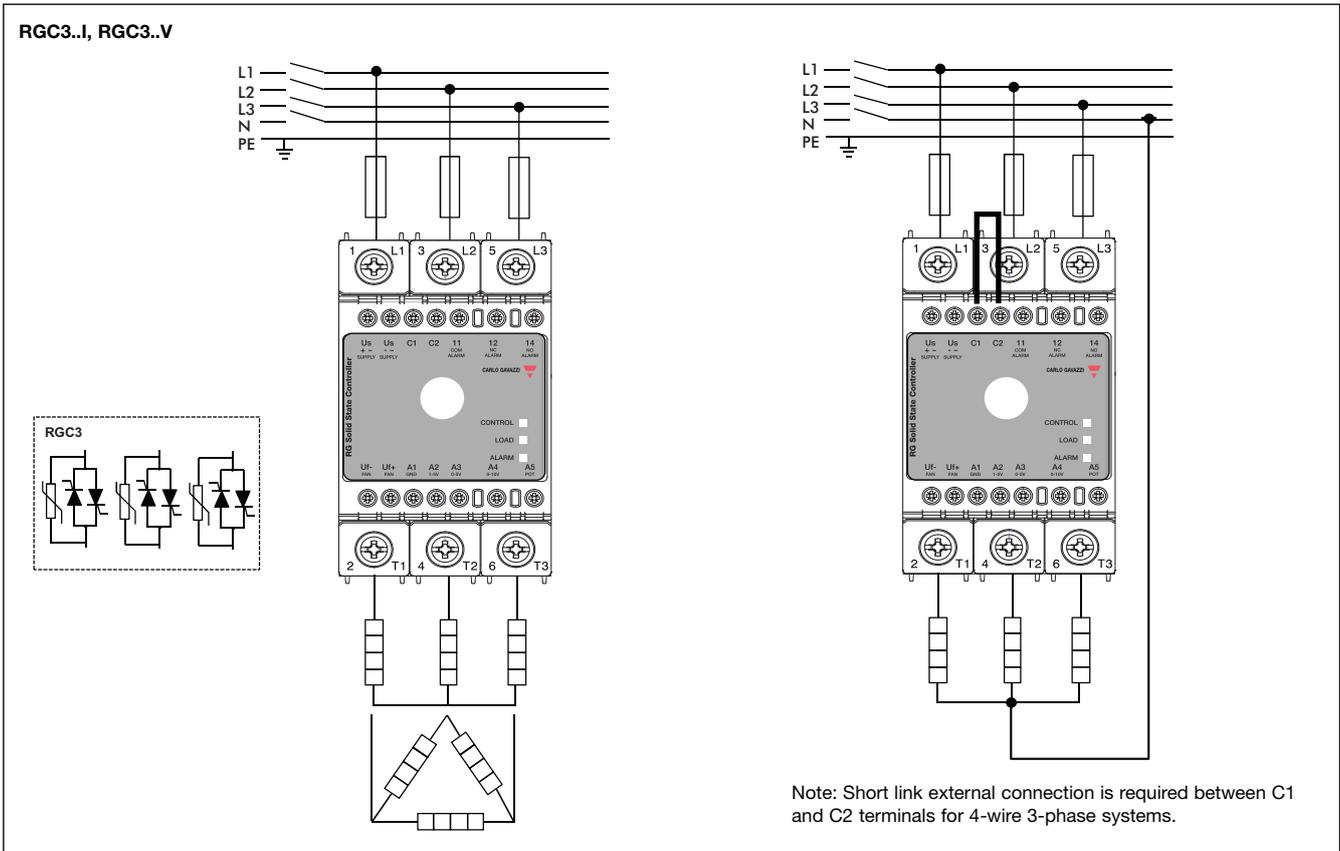


Connection Configuration

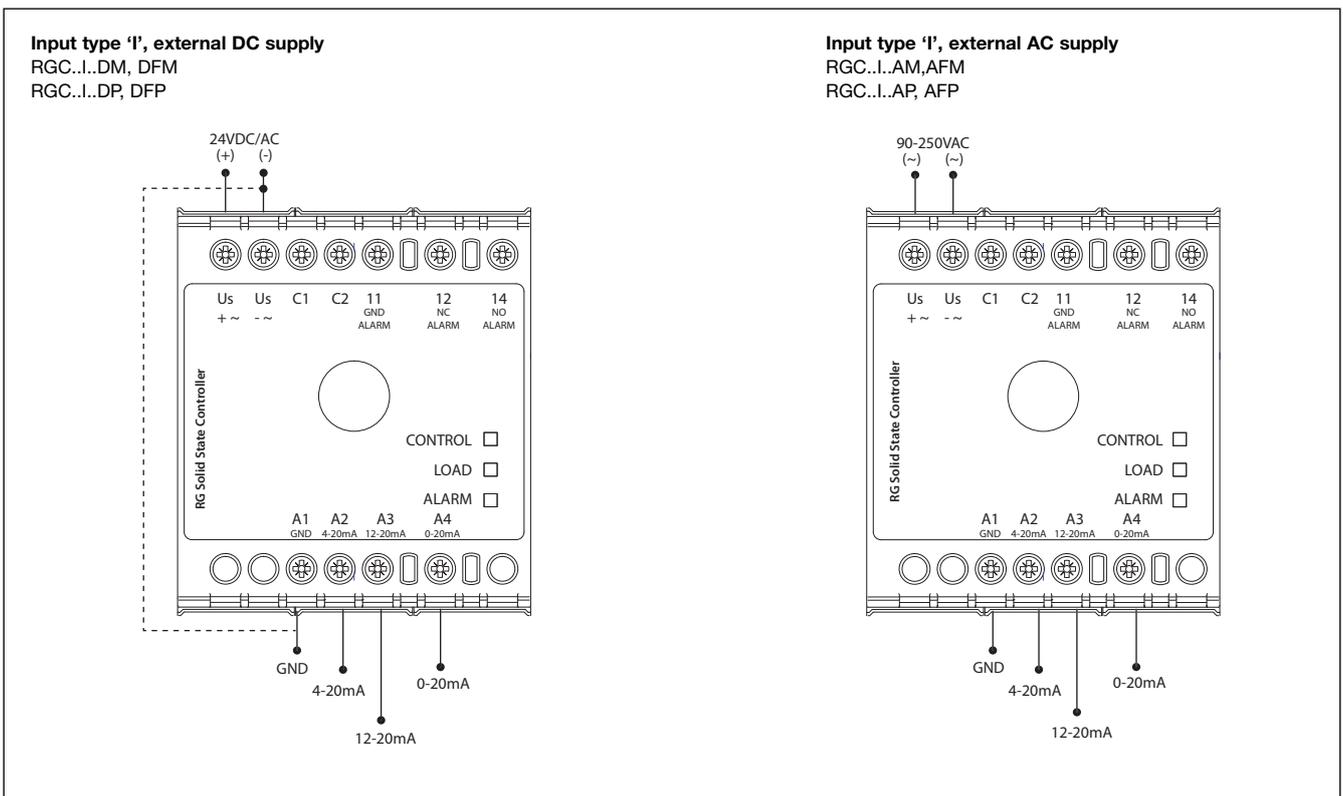


Note: Control input shall be connected either to A1-A2 or A1-A3 or A1-A4 only

Connection Configuration

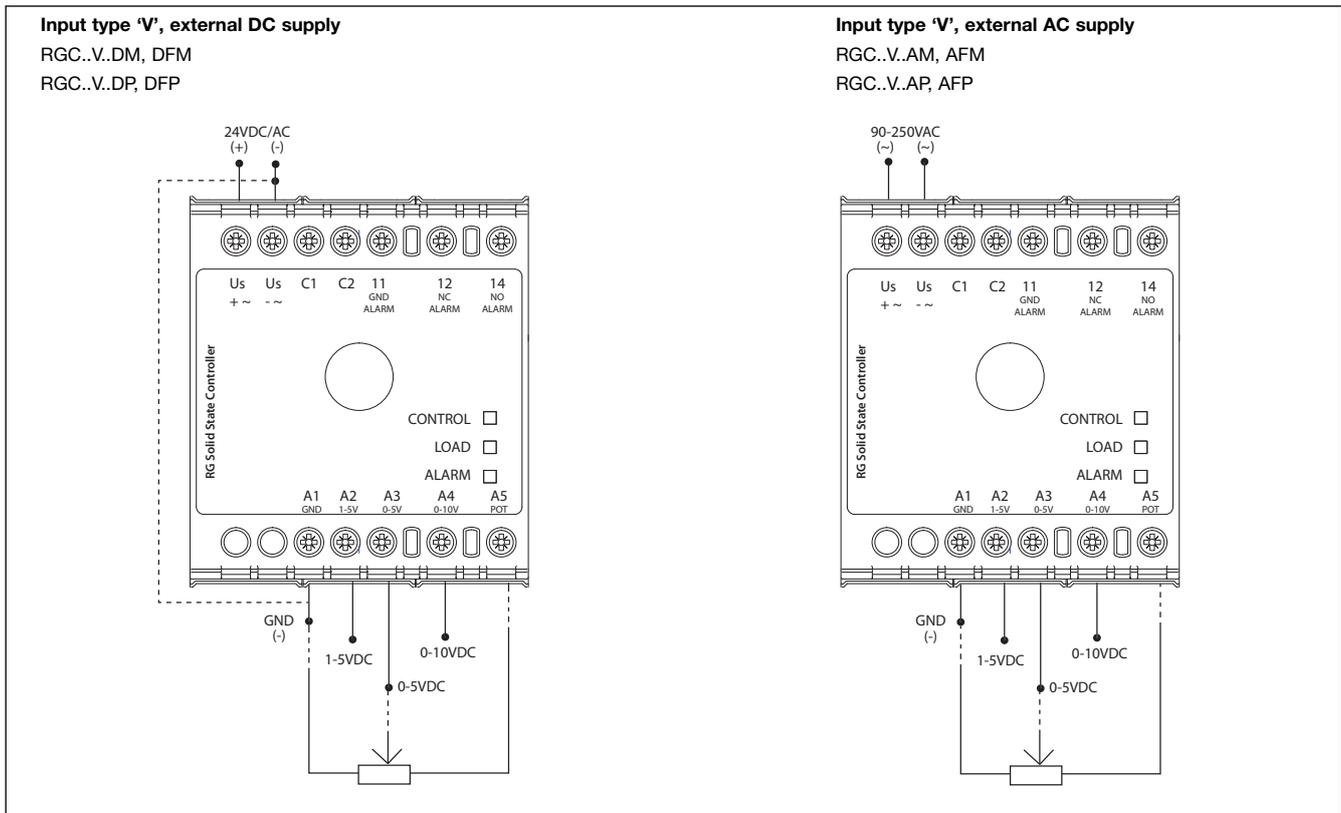

Note: Control input shall be connected either to A1-A2 or A1-A3 or A1-A4 or A1-A3-A5 in case an external potentiometer is used.

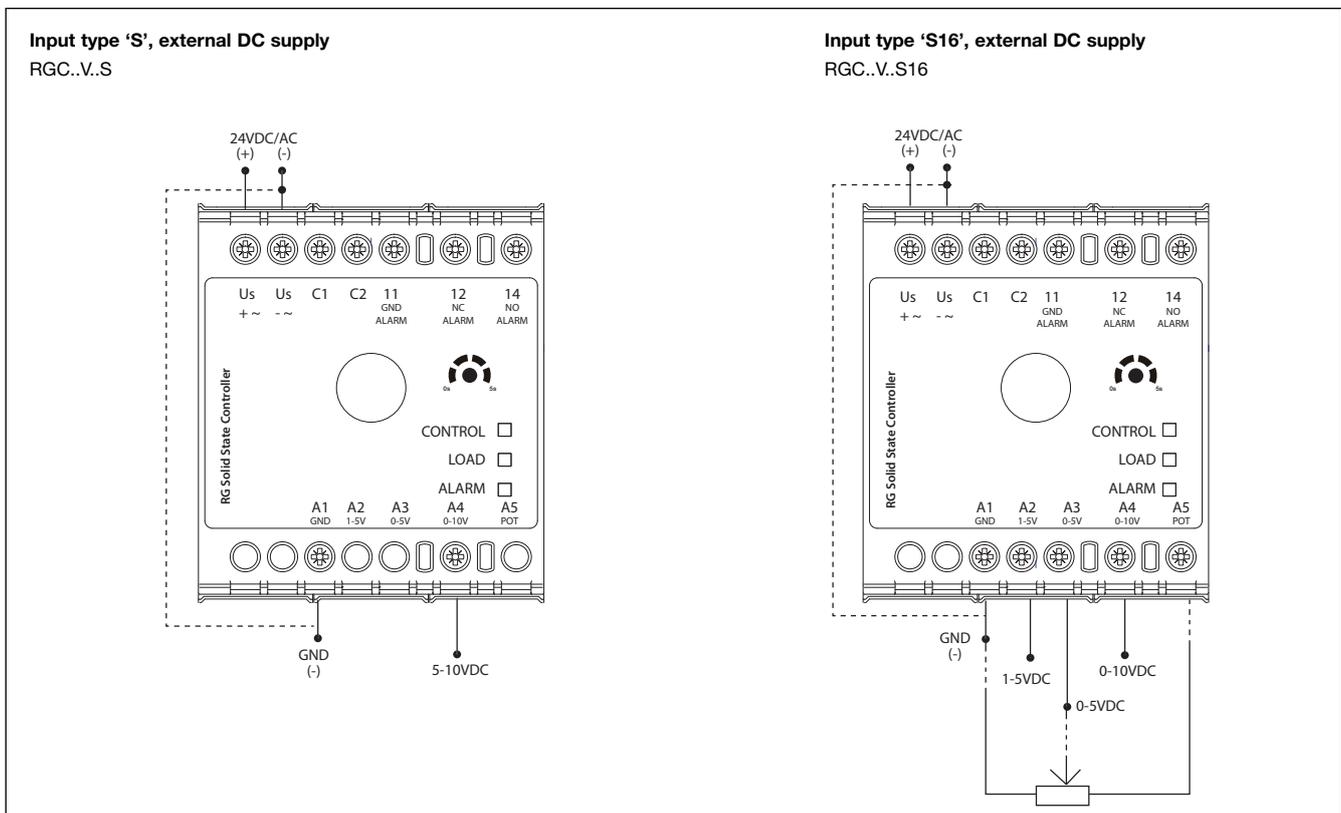


Note: Control input shall be connected to terminals A1-A4 in the case of the RGC3P..S.. In the case of the RGC3P..S16.., the control input shall be connected to either A1-A2 or A1-A3 or A1-A4 or A1-A3-A5 in case an external potentiometer is used.

Mode of Operation

RGC..AA...

The diagram below, Operation Diagram 1, indicates the behaviour of models having input type 'AA' in different operating conditions. The models with this type of input are able to detect abnormal conditions such as **Mains Loss** and **SSR Internal Fault**. The presence of these abnormal conditions is indicated through the green LED which in normal operating conditions is associated with status of the control input. A flashing sequence of this LED is utilised to distinguish such abnormal conditions. Refer to LED Indications section for further details.

Operation Diagram 1:

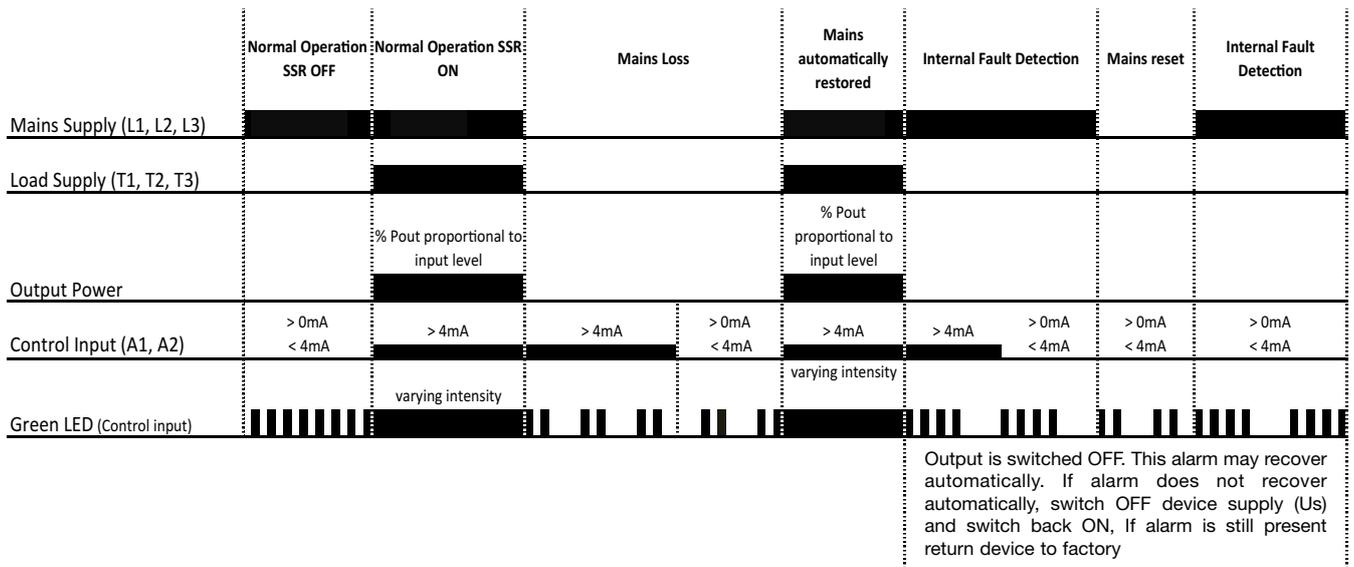

RGC..I, RGC..V.

The versions with input type 'I' or 'V' have integrated system monitoring for the detection of system and also SSR faults. An external supply of 24VDC/AC or 90-250VAC, selectable through part no. configuration, is required for the operation of these models.

In case of a fault condition, an alarm signal is issued through an EMR. A red LED is also used for visual indication with a specific flash rate for easy identification of the alarm type. Refer to section LED Indications for further details. Additionally, a yellow LED is present on the models with 'I' or 'V' input type which gives an indication of the status of the load. This LED is ON every time the SSR output, and hence the load, is in the ON state.

System monitoring is identified with suffix 'P' or 'M' at the end of the RGC part no. The following is a description of the difference between the two suffixes.

Note: Monitoring for system and SSR faults is not active during the soft start function available with models RGC3P60V..S.. and RGC3P60V..S16.

Mode of Operation


1. RGC..I..P, RGC..V..P

The versions with suffix 'P' are available only with switching mode 'E', i.e., phase angle. The detectable alarm conditions in this series are the following:


- Mains Loss (Operation Diagram 2)
- SSR Over Temperature (Operation Diagram 3)
- SSR Internal Fault (Operation Diagram 3)

The following operation diagrams show the behaviour of the RGC..I..P and RGC..V..P under different operating and abnormal conditions.

Operation Diagram 2:

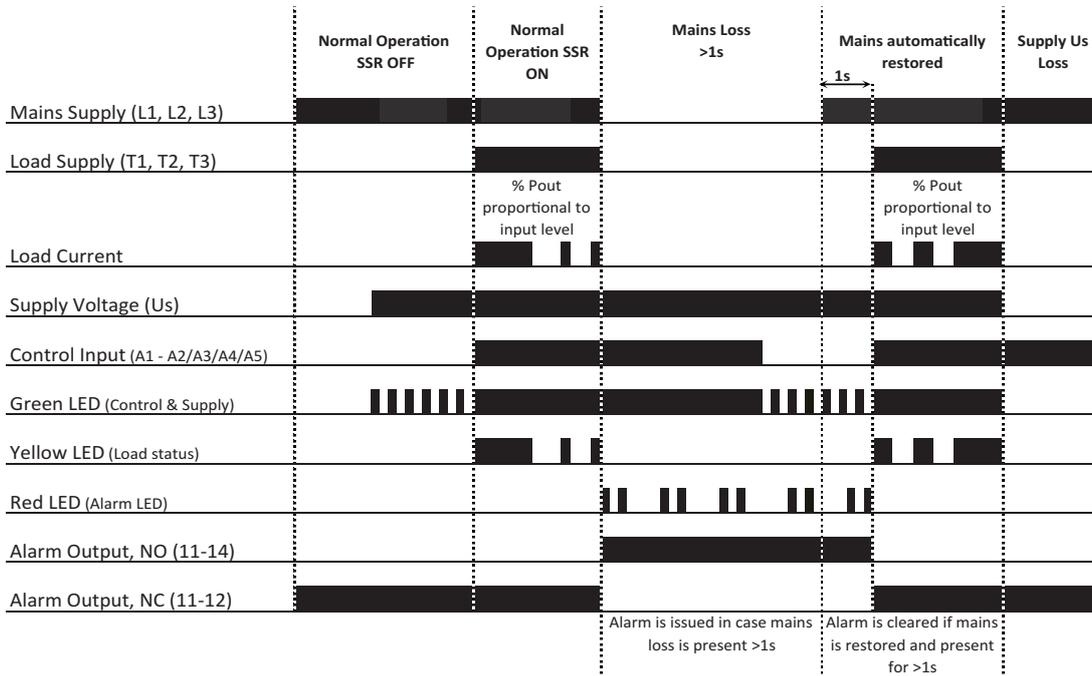

Operation Diagram 3:

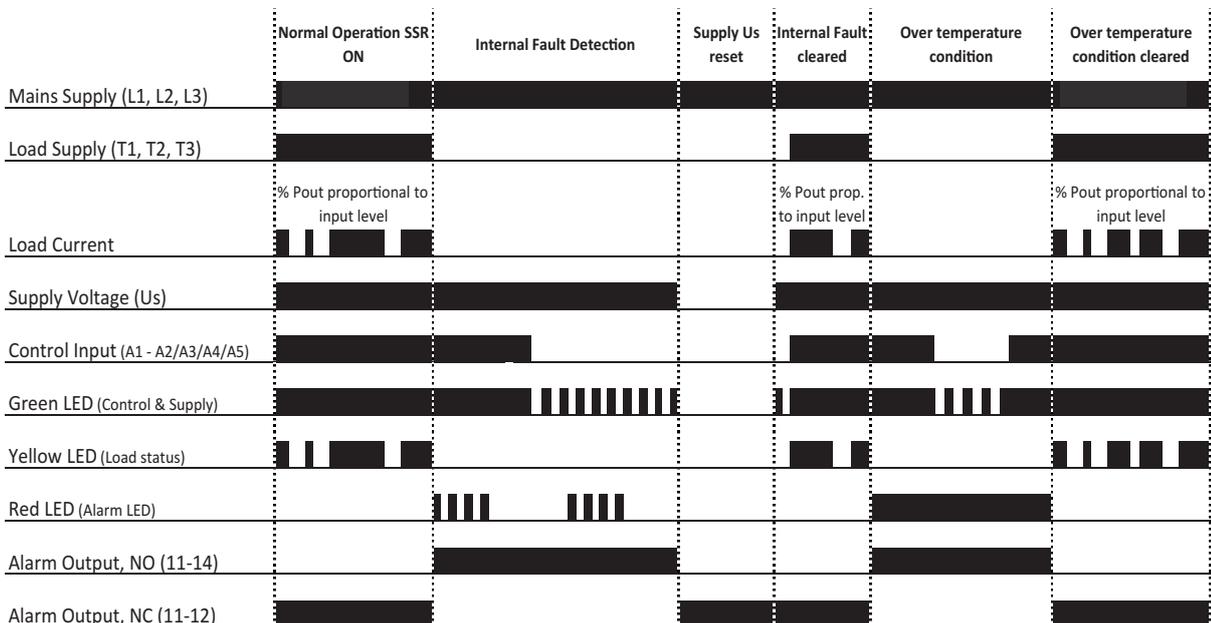

Mode of Operation


2. RGC..I..M, RGC..V..M

Suffix 'M' is available with all switching modes apart from mode 'E'. The detectable alarm conditions for the versions with suffix 'M' are the following:

- Mains Loss (Operation Diagram 2)
- SSR Over Temperature (Operation Diagram 3)
- SSR Internal Fault (Operation Diagram 3)
- Load Loss (Operation Diagram 4)
- SSR Open Circuit (Operation Diagram 4)
- SSR Short Circuit (Operation Diagram 5)


The operation diagrams for Mains Loss, SSR Over Temperature and SSR Internal Fault for the RGC..I..M and RGC..V..M are identical to those of RGC..I..P and RGC..V..P shown in Operation Diagrams 2 and 3. The following diagrams show the behaviour of the RGC..I..M and RGC..V..M under the additional detectable abnormal conditions available only with the 'M' suffix versions.

Operation Diagram 4:

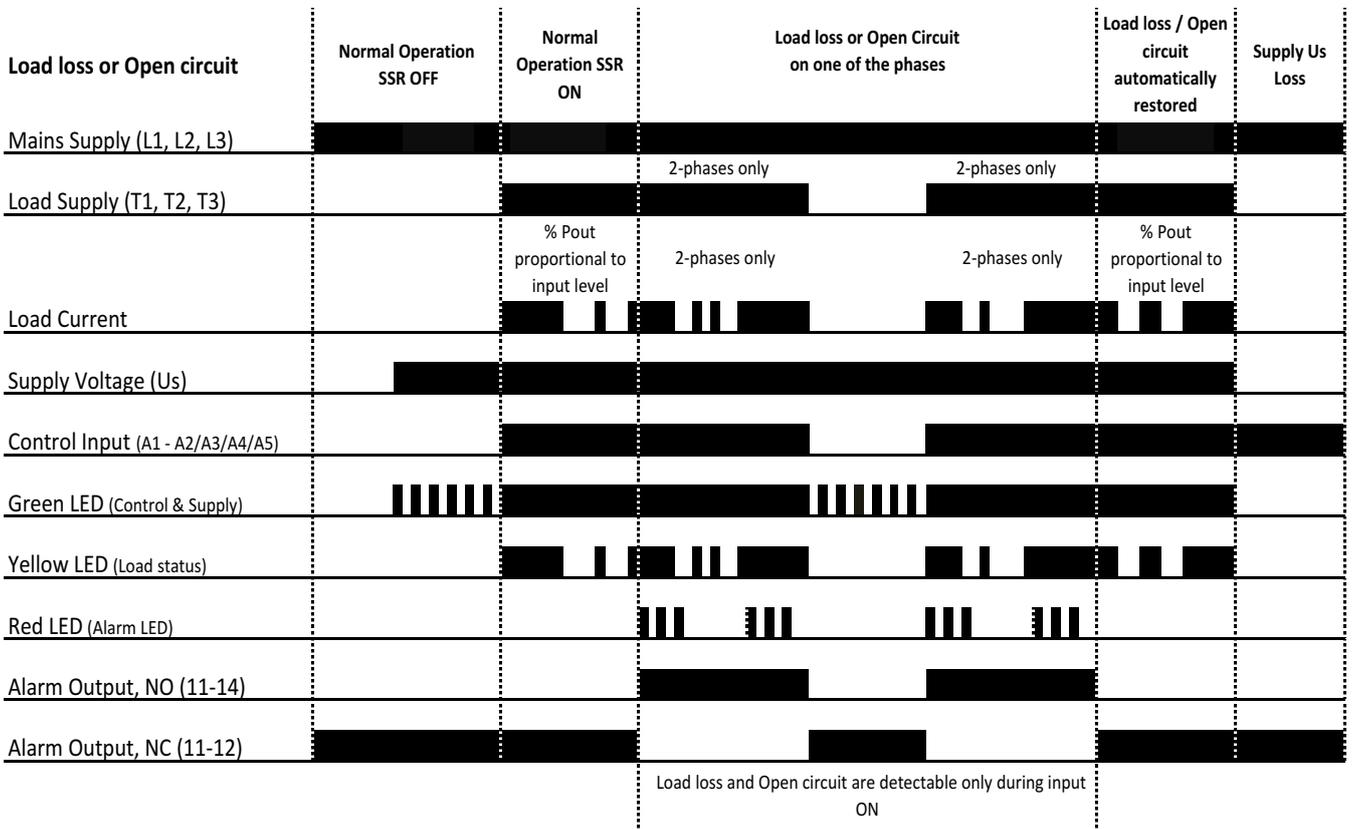


Mode of Operation

Operation diagram 5

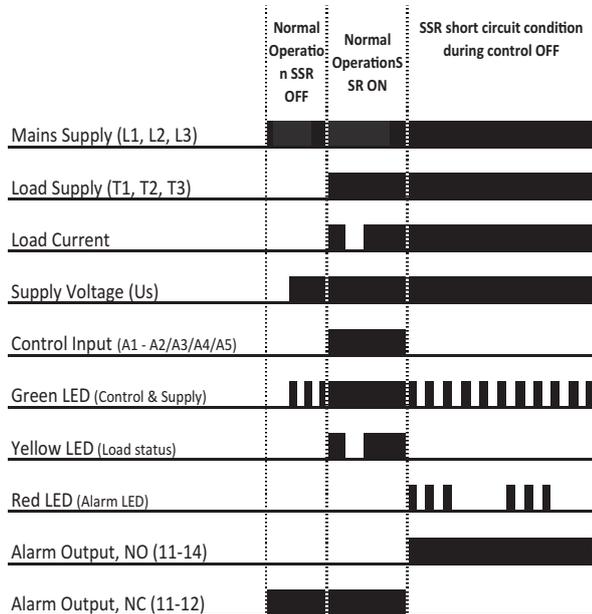

Fan operation for RGC..F.

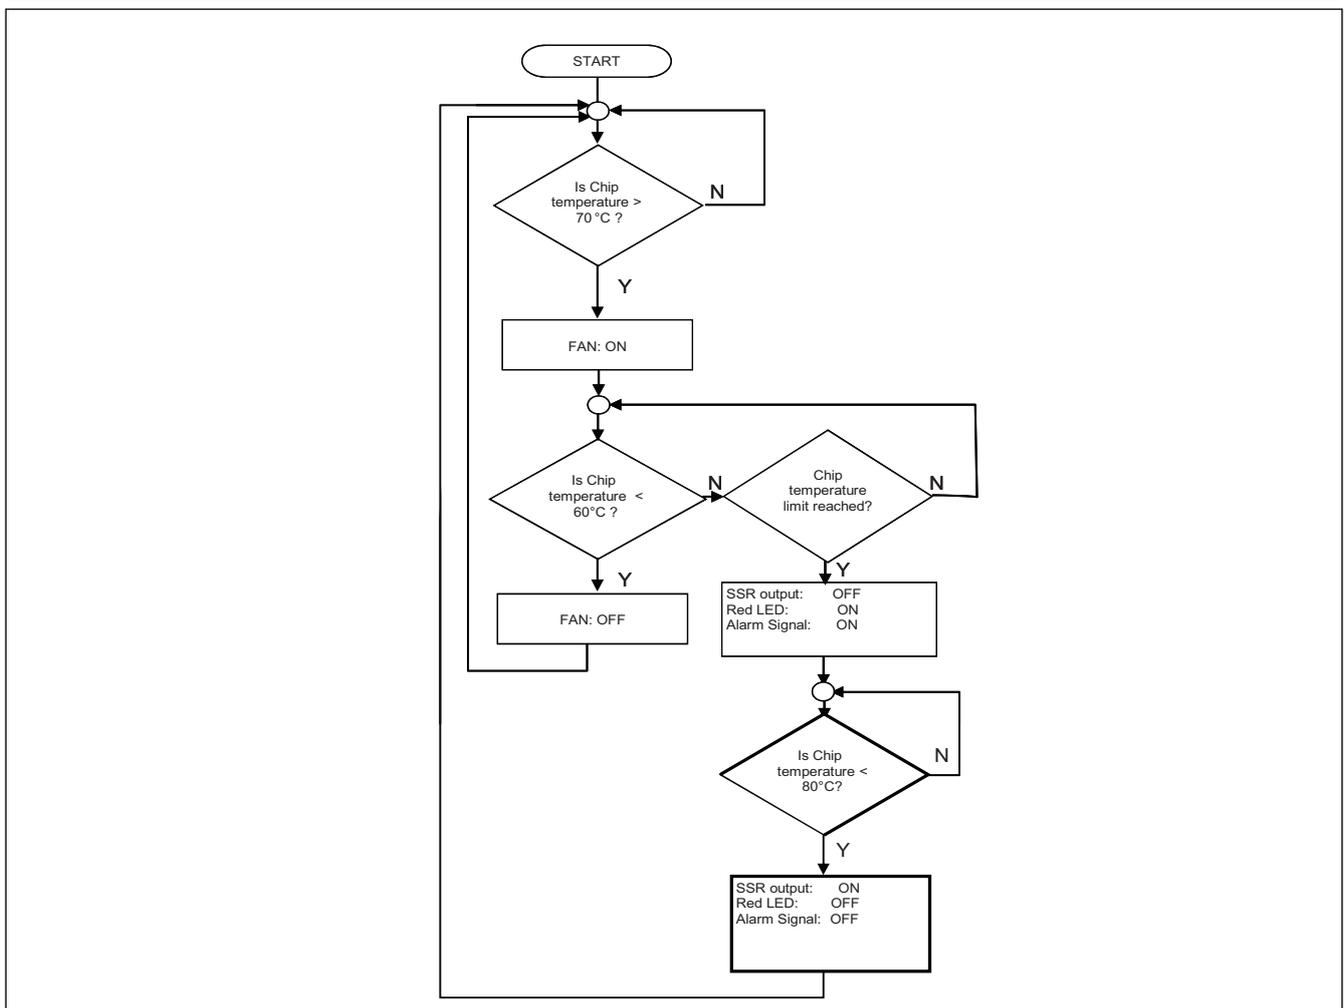

LED Indications

Green LED


	RGC..AA..	RGC..I.., RGC..V..
Control ON RGC..AA: <4mA flash rate 0.5s ON, 0.5s OFF RGC..I, RGC..V: ON in presence on control input		
Control ON RGC..AA: >4mA, varying intensity with input level		
Internal error: RGC..AA: 4 flashes 0.5s ON, 0.5s OFF with 3s OFF interval RGC..I, RGC..V: not applicable; refer to red LED		
Mains Loss RGC..AA: 2 flashes 0.5s ON, 0.5s OFF with 3s OFF interval RGC..I, RGC..V: not applicable; refer to red LED		
Supply ON: (no control input) RGC..AA: not applicable RGC..I, RGC..V: flash rate 0.5s ON, 0.5s OFF		

In case of an internal error, attempt to reset the Mains supply by Switching OFF and back ON to clear the error condition. If this condition is still present, return device to factory.

Red LED

Flashes	Red LED	Timing Diagram
2	Mains Loss	
3	Monitoring alarm: Load loss, SSR open circuit, SSR short circuit	
4	SSR internal fault	
100%	SSR over temperature	

Installation Instructions

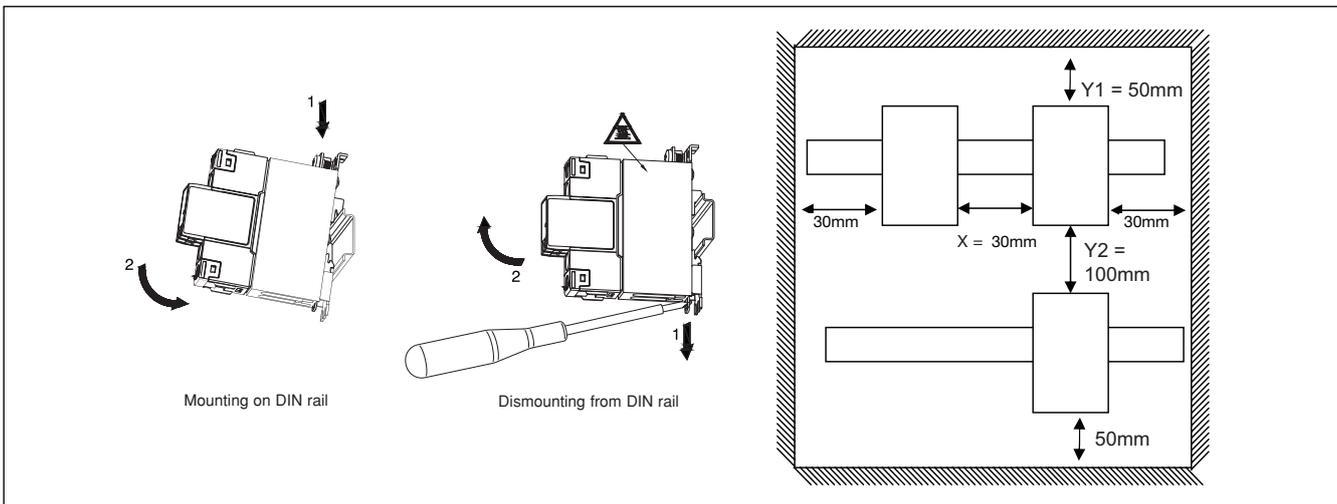

Short Circuit Protection

Protection Co-ordination, Type 1 vs Type 2:

Type 1 protection implies that after a short circuit, the device under test will no longer be in a functioning state. In type 2 co-ordination the device under test will still be functional after the short circuit. In both cases, however the short circuit has to be interrupted. The fuse between enclosure and supply shall not open. The door or cover of the enclosure shall not be blown open. There shall be no damage to conductors or terminals and the conductors shall not separate from terminals. There shall be no breakage or cracking of insulating bases to the extent that the integrity of the mounting of live parts is impaired. Discharge of parts or any risk of fire shall not occur.

The product variants listed in the table hereunder are suitable for use on a circuit capable of delivering not more than 100,000A Symmetrical Amperes, 600Volts maximum when protected by fuses. Tests at 100,000Arms were performed with Class J fuses, fast acting; please refer to the tables below for maximum ratings.

Tests with Class J fuses are representative of Class CC fuses.

Co-ordination type 1 (UL508)

Part No.	Max. fuse size [A]	Class	Short circuit current [kArms]	Voltage [VAC]
RGC2..15 RGC2..25	30	J or CC	100	Max. 600
RGC2..40	40	J	100	Max. 600
RGC2..75	60 ⁶	J	100	Max. 600
RGC3..20	30	J or CC	100	Max. 600
RGC3..30	40	J	100	Max. 600
RGC3..65	60 ⁶	J	100	Max. 600

6: Consult a Carlo Gavazzi sales representative for use of 70A class J fuses

Co-ordination type 2 (EN/IEC 60947-4-3)

Part No.	Ferraz Shawmut (Mersen)		Siba		Short circuit current [kArms]	Voltage [VAC]
	Max. fuse size [A]	Part number	Max. fuse size [A]	Part Number		
RGC2..15 RGC2..25	40	660 URC 14x51/40	32	50 142 06 32	10	600
	40	6.9xx gRC URD 22x58/40			100	
	40	660 URD 22x58/40				
	40	A70QS40-4				
RGC2..40	63	6.9xx gRC URC 14x51/63	63	50 194 20 63	10	600
	63	6.9xx gRC URD 22x58/63			100	
	60	A70QS60-4				
RGC2..75	100	6.9xx gRC URD 22x58/100	125	50 196 20 125	10	600
	100	660 URQ 27x60/100			100	
	100	A70QS100-4				
RGC3..20	32	6.9xx gRC URC 14x51/32	32	50 142 06 32	10	600
	32	6.9xx gRC URC 14x51/32			100	
	40	A70QS40-4				
RGC3..30	40	6.9xx gRC URC 14x51/40	40	50 194 20 40	10	600
	40	6.9xx gRC URC 14x51/40			100	
	40	A70QS40-4				
RGC3..65	100	6.9xx gRC URC 22x58/100	125	50 196 20 125	10	600
	90	660 URD 22x58/90			100	
	100	A70QS100-4				

Type 2 Protection Coordination with Miniature Circuit Breakers (M.C.Bs)

Solid State Relay type	ABB Model no. for Z - type M. C. B. (rated current)	ABB Model no. for B - type M. C. B. (rated current)	Wire cross sectional area [mm ²]	Minimum length of Cu wire conductor [m] ⁷
RGC2..15 RGC2..25 RGC3..20	S201 - Z10 (10A)	S201 - B4 (4A)	1.0	7.6
			1.5	11.4
			2.5	19.0
	S201 - Z16 (16A)	S201 - B6 (6A)	1.0	5.2
			1.5	7.8
			2.5	13.0
			4.0	10.8
	S201 - Z20 (20A)	S201 - B10 (10A)	1.5	12.6
			2.5	21.0
	S201 - Z25 (25A)	S201 - B13 (13A)	2.5	25.0
			4.0	40.0
	RGC2..40 RGC3..30	S201 - Z20 (20A)	S201 - B10 (10A)	1.5
2.5				7.0
4.0				11.2
S201 - Z32 (32A)		S201 - B16 (16A)	2.5	13
			4.0	20.8
			6.0	31.2
RGC2..75 RGC3..65	tbd	tbd	tbd	tbd

7: Between MCB and Load (including return path which goes back to the mains if applicable)

Note: A prospective current of 6kArms and a 230/400V power supply system is assumed for the above suggested specifications. For cables with different cross section than those mentioned above please consult Carlo Gavazzi's Technical Support Group.

Accessories

Fan



Ordering Key

RGC3FAN60

Fan accessory
for RGC2..75 and RGC3..65