



# Đầu cos Chĩa 1.25Y

Size dây  $0.25\text{mm}^2 \sim 1.65\text{mm}^2$





ĐẦU CỐT (COSSE) CHỈA 1.25Y NICHIFU NHẬT BẢN



Thông số kỹ thuật

SPADE TERMINALS (Y TYPE)



RoHS10  
See page 2

Y TYPE

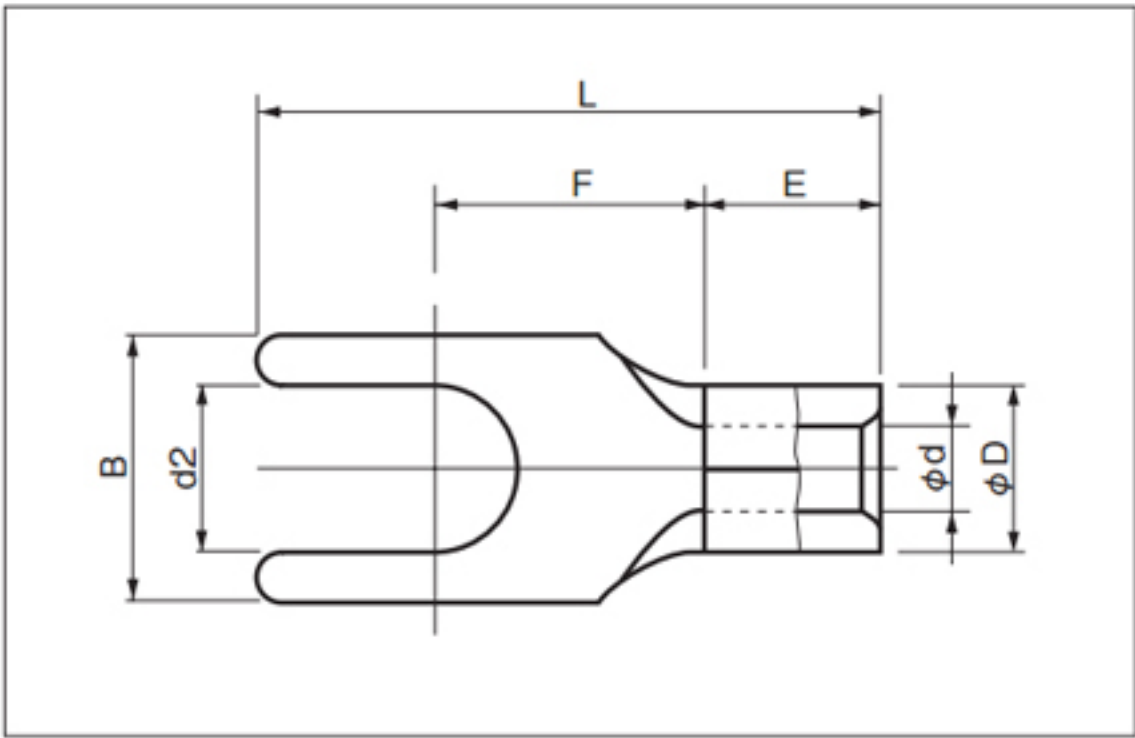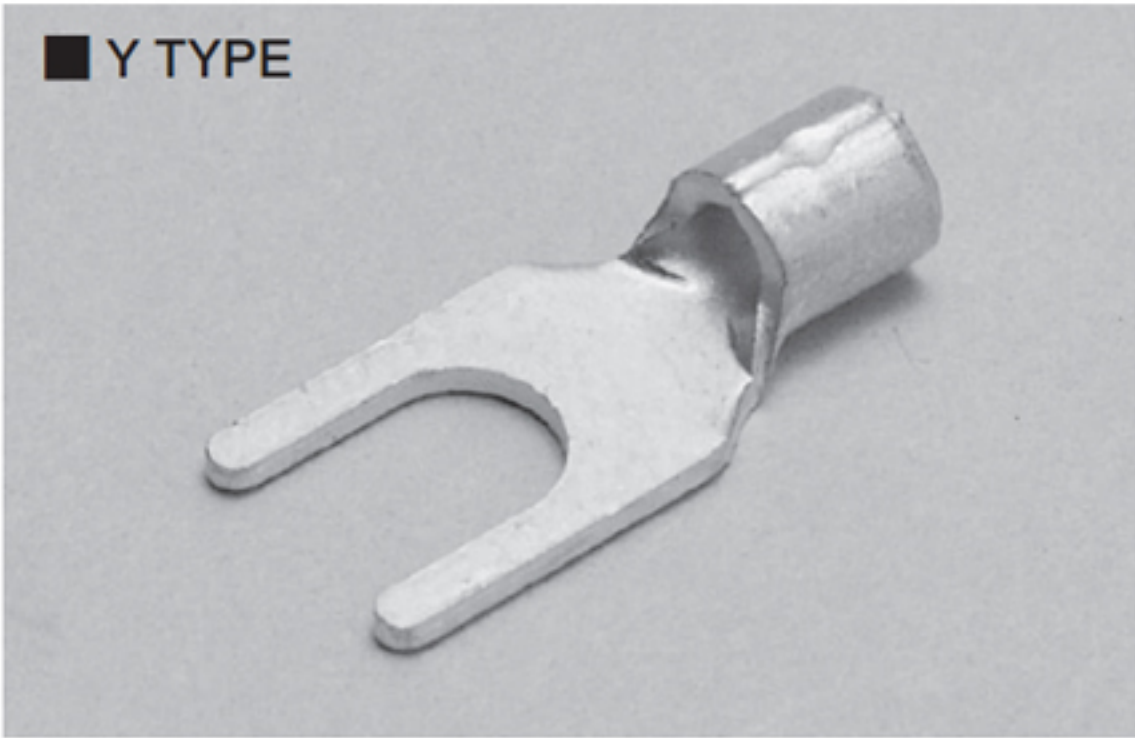

| PART NUMBER         | DIMENSIONS mm |     |      |     |     |     |     | WIRE RANGE        |                          |       | TOOL No.      |                | STD QTY/BOX       |
|---------------------|---------------|-----|------|-----|-----|-----|-----|-------------------|--------------------------|-------|---------------|----------------|-------------------|
|                     | d2            | B   | L    | F   | E   | φ D | φ d | SOLID mm          | STRANDED mm <sup>2</sup> | AWG   | HAND TOOL No. |                |                   |
|                     |               |     |      |     |     |     |     |                   |                          |       | TOOL BODY No. | DIES No.       |                   |
| <b>1.25Y-2.5</b> ○  | 2.7           | 4.7 | 11.7 | 5.1 | 4.5 | 3.4 | 1.7 | 0.57<br>∩<br>1.44 | 0.25<br>∩<br>1.65        | 22-16 | NH 1<br>NH 69 |                | 1,000<br>(100×10) |
| <b>1.25Y-3K</b> ○   | 3.2           | 5.6 | 15.0 | 5.8 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3S</b> ○   |               | 5.7 | 11.9 | 4.8 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3</b> ○    |               | 5.8 | 15.0 | 5.8 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3N</b> ○   |               |     | 16.0 | 6.6 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3.5K</b> ○ | 3.7           | 5.6 | 15.0 | 5.8 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3.5</b> ○  |               | 5.8 |      |     |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-3L</b> ○   |               | 6.2 |      |     |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-4N</b> ○   | 4.3           | 6.4 | 16.4 | 6.6 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-4S</b> ○   |               | 7.0 |      | 7.6 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-4M</b> ○   |               | 8.1 |      | 7.5 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-4L</b> ○   |               | 9.6 | 17.5 | 8.3 |     |     |     |                   |                          |       |               |                |                   |
| <b>1.25Y-5</b> ○    | 5.3           | 9.6 | 17.5 | 8.3 |     |     |     |                   |                          |       | NA 10<br>NA 3 | N10 01<br>N3 7 |                   |
| <b>1.25Y-6</b> ○    | 6.4           |     |      |     |     |     |     |                   |                          |       |               |                |                   |

- NOTE 1) ○ : UL, CSA    △ : UL  
2) Refer to page 14 for UL/CSA and proper strip length of wire.  
3) Tongue shape of 1.25Y-3S/14Y-6/14Y-8 is shown on the right.

