



MST 1-PHASE SAFETY TRANSFORMER

P: 1600VA IN: 230/400VAC+-15VAC OUT:2x24VAC

Single-phase safety transformer  
1600 VA  
Isolation class T 40/B

Link to Product

Illustration

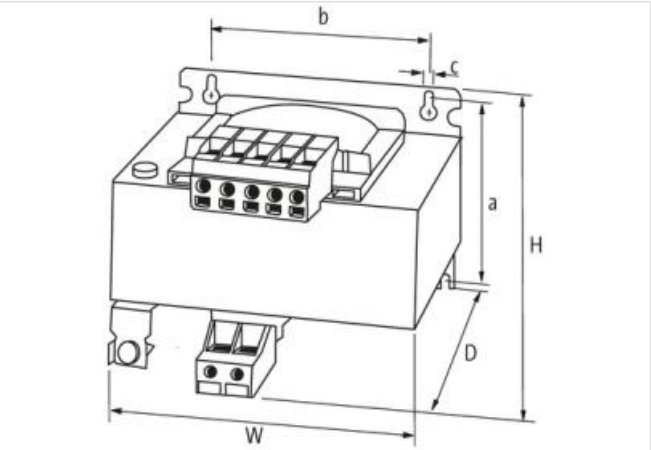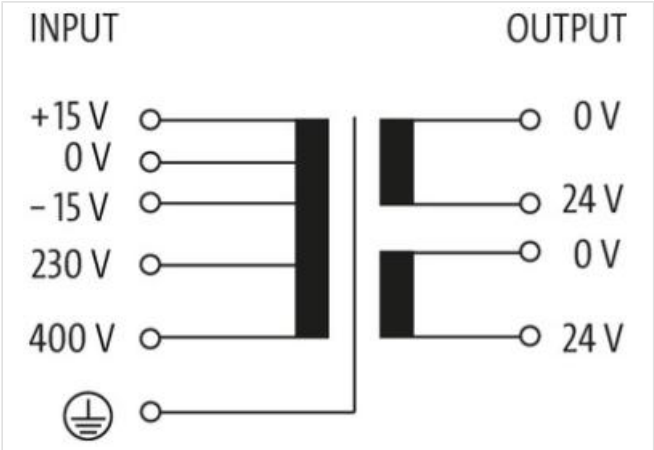

Product may differ from Image



Input	
Input voltage	230/400 ±15 V AC
Inrush current	135 A (230 V AC); 69 A (400 V AC)
Short-circuit current	275 A (230 V AC); 163 A (400 V AC)
Input current	7.3 A (230 V AC); 4.2 A (400 V AC)
Frequency	50...60 Hz
Output	

Output voltage	1 × 24/1 × 48/2 × 24 V AC
Output rating	1600 VA

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	141.5×135×7 mm
Dimensions H×W×D	168×174×222 mm