



MST 1-PHASE SAFETY TRANSFORMER

P: 2500VA IN: 230/400VAC+/-15VAC OUT:2x24VAC

Single-phase safety transformer  
2500 VA  
Isolation class T 40/B

[Link to Product](#)

Illustration

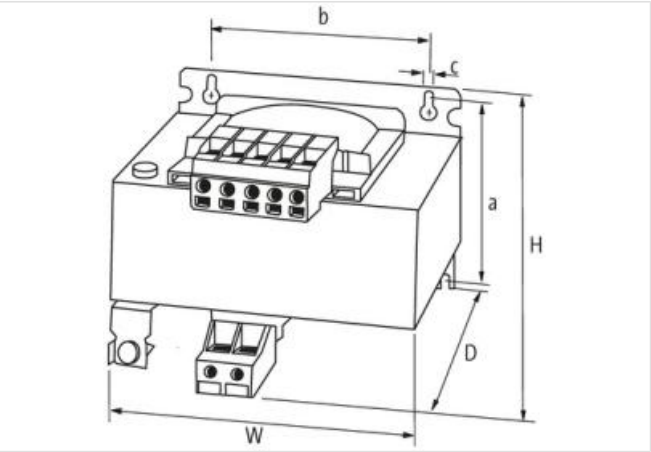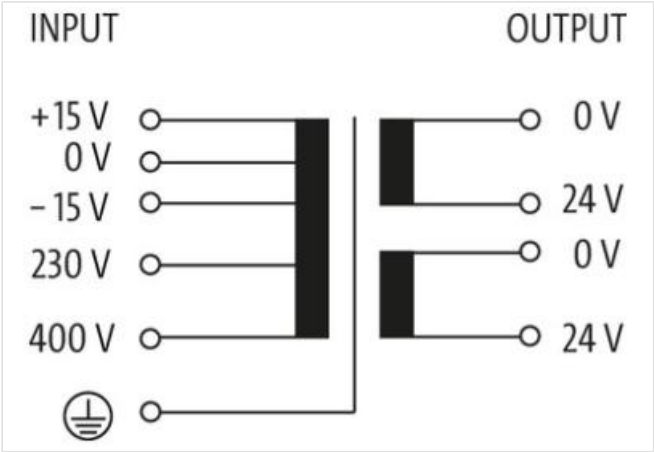

Product may differ from Image



Input	
Input voltage	230/400 ±15 V AC
Inrush current	205 A (230 V AC); 98 A (400 V AC)
Short-circuit current	504 A (230 V AC); 300 A (400 V AC)
Input current	11.1 A (230 V AC); 6.5 A (400 V AC)
Frequency	50...60 Hz
Output	

Output voltage	1 × 24/1 × 48/2 × 24 V AC
Output rating	2500 VA

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	10×18 mm
Fixing centers a×b×c	150×150×10 mm
Dimensions H×W×D	182×192×242 mm