



MST 1-PHASE SAFETY TRANSFORMER

P: 630VA IN: 230/400VAC+/-15VAC OUT:2x24VAC

Single-phase safety transformer  
630 VA  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

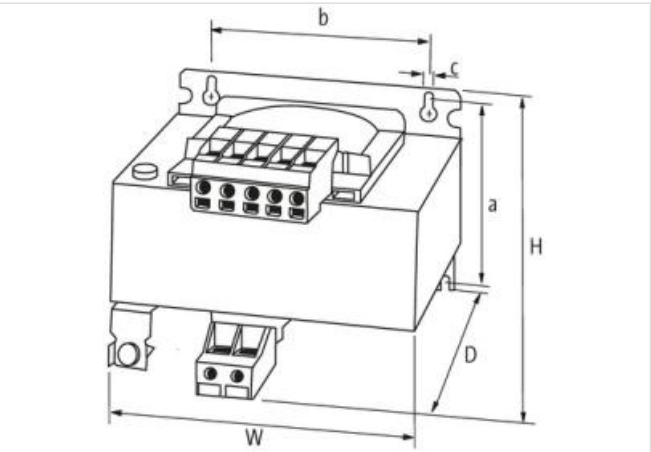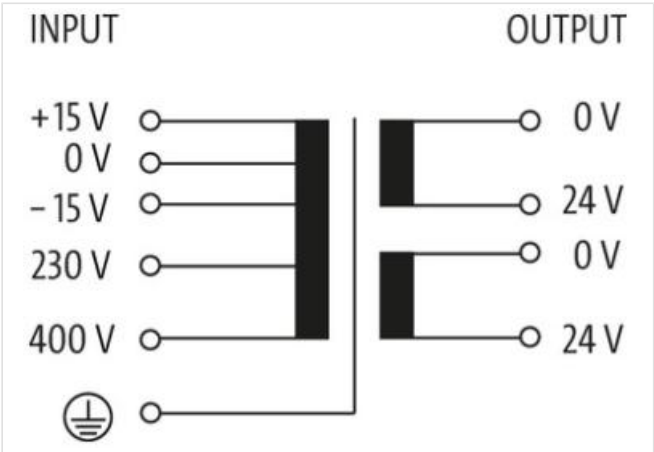

Product may differ from Image



Input	
Input voltage	230/400 ±15 V AC
Inrush current	56 A (230 V AC); 26 A (400 V AC)
Short-circuit current	68 A (230 V AC); 39 A (400 V AC)
Input current	3 A (230 V AC); 1.7 A (400 V AC)
Frequency	50...60 Hz

Output	
Output voltage	1× 24/1× 48/2× 24 V AC
Output rating	630 VA
General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	90.5×122×7 mm
Dimensions H×W×D	120.5×150×165 mm