



MICO 4.10 SPEED-START electronic circuit protection

4 channels

MICO 4.10 SPEED START  
4 channels  
Current adjustment 4, 6, 8, 10 A  
optimized start-up behavior  
max. 30 mF (per channel)

[Link to Product](#)

Illustration

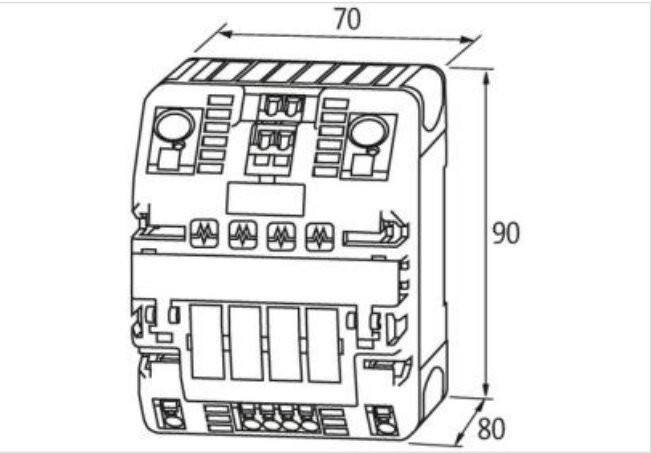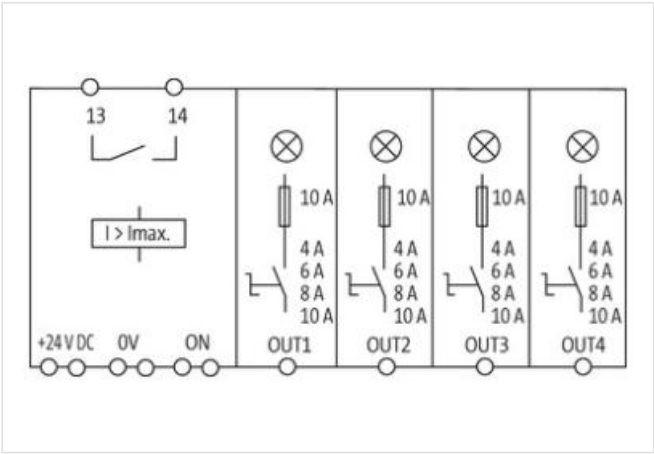

Product may differ from Image



Input	
Operating voltage	24 V DC (18...30 V DC)
Output	
Inrush capacity	max. 30 mF (per channel)
Current adjustment	4 A, 6 A, 8 A, 10 A, by countersunk rotary switch, sealed

Control inputs	
Input voltage (ON)	10...30 V DC
Impulse length (ON)	min. 20 ms
Control outputs	
Group alarm output	potential free 30 V AC/DC, 100 mA
General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 × 4 mm <sup>2</sup>
Input terminals	2 × 16 mm <sup>2</sup>
Alarm terminals	2.5 mm <sup>2</sup>