



MICO electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V DC / 1-2-4-6 A

MICO 4.6
4 channels
Current adjustment 1, 2, 4, 6 A

Link to Product

Illustration

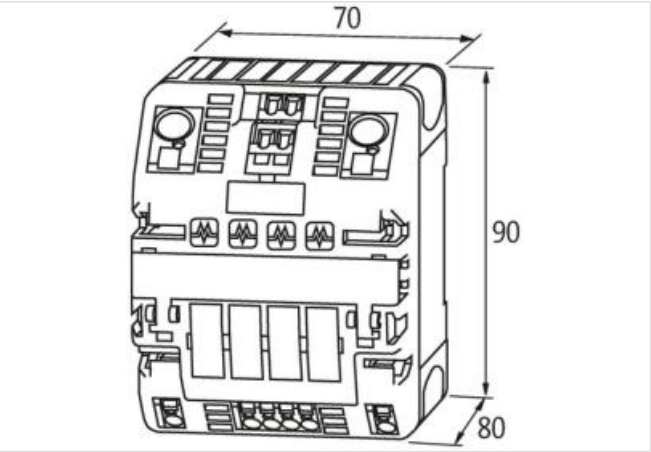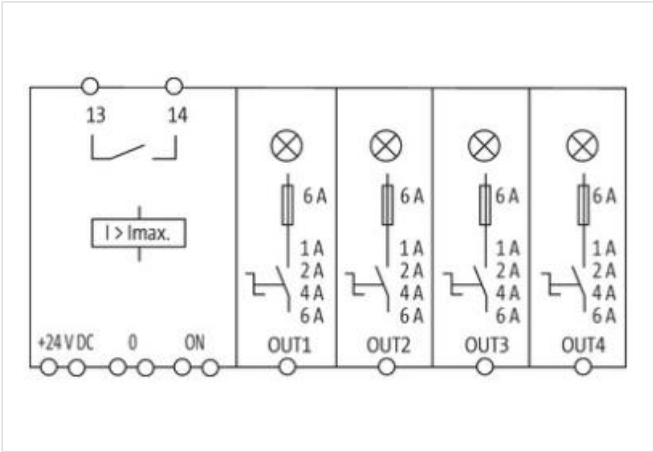

Product may differ from Image



Input	
Operating voltage	24 V DC (18...30 V DC)
Output	
Inrush capacity	max. 20 mF (per channel)
Current adjustment	1 A, 2 A, 4 A, 6 A, by countersunk rotary switch, sealed
Control inputs	
Input voltage (ON)	10...30 V DC

Impulse length (ON)	min. 20 ms
---------------------	------------

Control outputs

Group alarm output	potential free 30 V AC/DC, 100 mA
--------------------	-----------------------------------

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 × 4 mm ²
Input terminals	2 × 16 mm ²
Alarm terminals	2.5 mm ²