

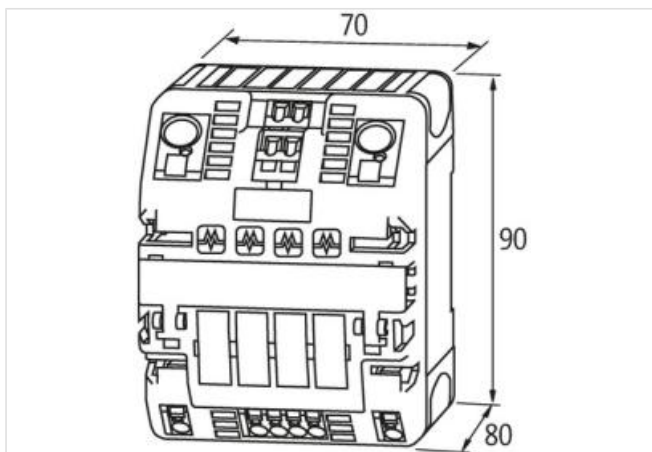
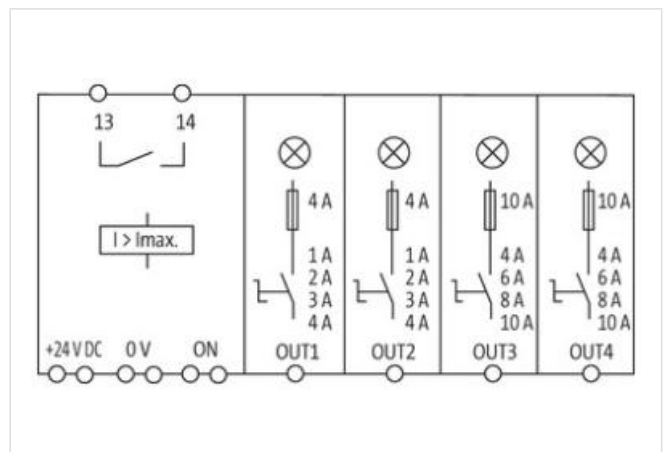
**MICO electronic circuit protection, 4 CHANNELS**

IN: 24 V DC OUT: 24 V DC / 2x 1-2-3-4 A &amp; 2x 4-6-8-10 A

**MICO 4.4.10 ACTUATOR-SENSOR**

4 channels

Current adjustment 2x 1 A, 2 A, 3 A, 4 A; 2x 4 A, 6 A, 8 A, 10 A

[Link to Product](#)**Illustration**

Product may differ from Image

**Input**

Operating voltage 24 V DC (18...30 V DC)

**Output**

Inrush capacity max. 20 mF (per channel)

Current adjustment 1 A, 2 A, 3 A, 4 A; 4 A, 6 A, 8 A, 10 A, by countersunk rotary switch, sealed

**Control inputs**

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

**Control outputs**

Group alarm output potential free 30 V AC/DC, 100 mA

**General data**

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 × 4 mm <sup>2</sup>
Input terminals	2 × 16 mm <sup>2</sup>
Alarm terminals	2.5 mm <sup>2</sup>