

Mico Pro electronic circuit protection, 1 channel

IN: 24 V DC OUT: 24 V DC / 1-2-3-4-5-6-7-8-9-10A


Mico Pro® flex 1.10
1 channel
1, 2, 3, 4, 5, 6, 7, 8, 9, 10 A
Build your own Mico Pro® online:
[START](#)

Link to Product

Illustration



Product may differ from Image

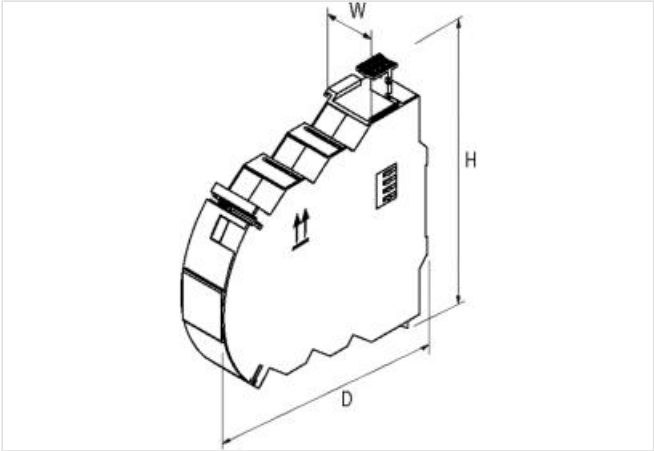

Input	
Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A
Output	
Parallel usage/serial usage	-/Selectivity in 2 levels
No. of channels	1
Inrush capacity	max. 30 mF
Tolerance	0...+20%
Current adjustment	1, 2, 3, 4, 5, 6, 7, 8, 9, 10 A
Control inputs	
Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms
Control outputs	
Early warning (90%)	like operating voltage - max. 20 mA, via power module
Group alarm output	via power module
General data	

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions H×W×D	130×8×114 mm
Bridging concept	Bridge set (max. 40 A)

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.2...4 mm ² (AWG 24...12)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.2...2.5 mm ² (AWG 24...14)