

Mico Pro Power module

IN: 24 V DC / 40A, 16mm² / Cover plate included (heavy duty)


Mico Pro® PM 24 V DC/40 A
Cover plate included (heavy duty)
Shock load
1/2 sin 40 g, 11 ms
Build your own Mico Pro® online:
[START](#)

Link to Product

Illustration



Product may differ from Image

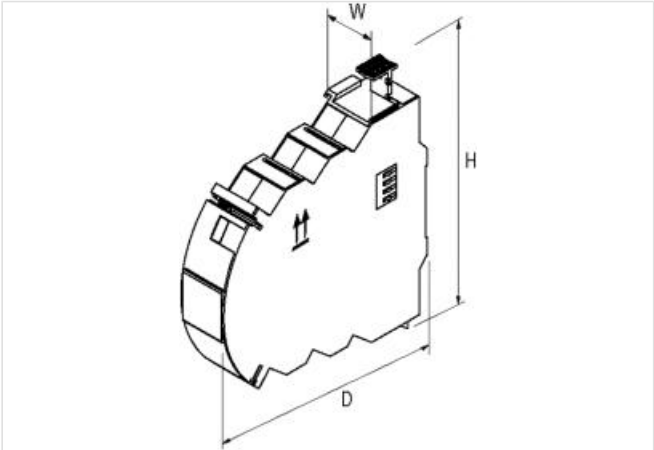

Input	
Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A
Output	
Parallel usage/serial usage	-/Selectivity in 2 levels
Control inputs	
Input voltage (ON)	9...30 V DC
Impulse length (CTRL)	OFF "high" 40/400 ms, ON "high" 20/200 ms
Input voltage (CTRL)	9...30 V DC
Impulse length (ON)	"high" 120 ms
Control outputs	
Early warning (90%)	max. 30 V AC/DC
Group alarm output	max. 30 V AC/DC
General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20

Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)
Shock load	1/2 sin 40 g, 11 ms

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.75...16 mm ² (AWG 20...4)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.75...16 mm ² (AWG 20...4)