



MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:160VA IN:200/208/220/240VAC OUT:2x115VAC

Single-phase - Control and Isolation Transformers  
160 VA  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

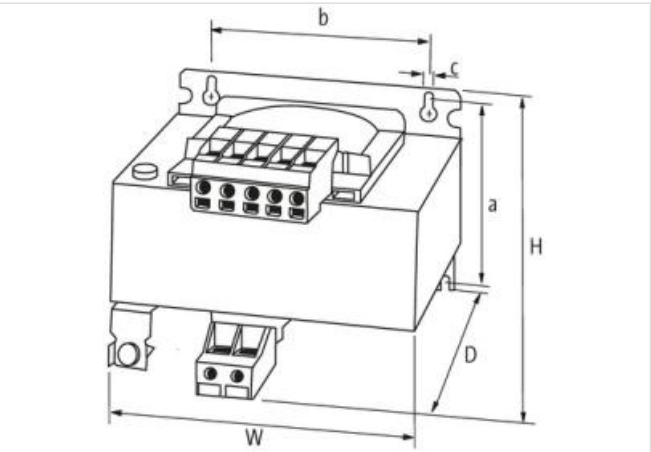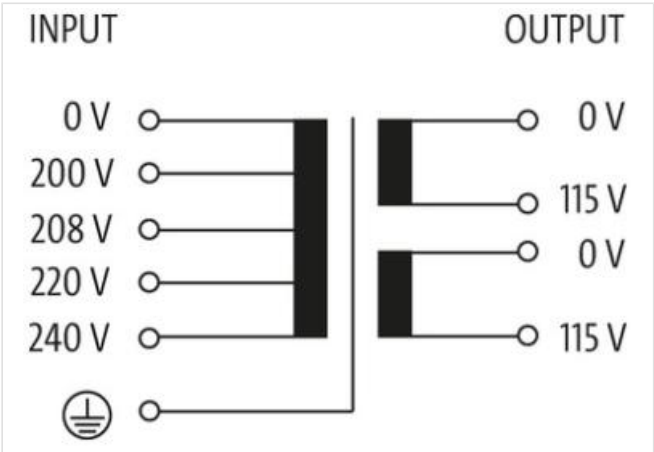

Product may differ from Image



Input	
Input voltage	200, 208, 220, 240 V AC
Inrush current	9 A (200 V AC)
Short-circuit current	14.4 A (200 V AC)
Input current	0.92 A (200 V AC)
Frequency	50...60 Hz

Output	
Output voltage	2× 115 V AC
Output rating	160 VA
General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.9 kV
Drill hole Ø	5.8×12 mm
Fixing centers a×b×c	75.3×84×5.8 mm
Dimensions H×W×D	91×97×105 mm