



MST SINGLE-PHASE SAFETY TRANSFORMER

P:160VA IN:230VAC OUT:20VAC

Single-phase - Control and Isolation Transformers  
160 VA  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

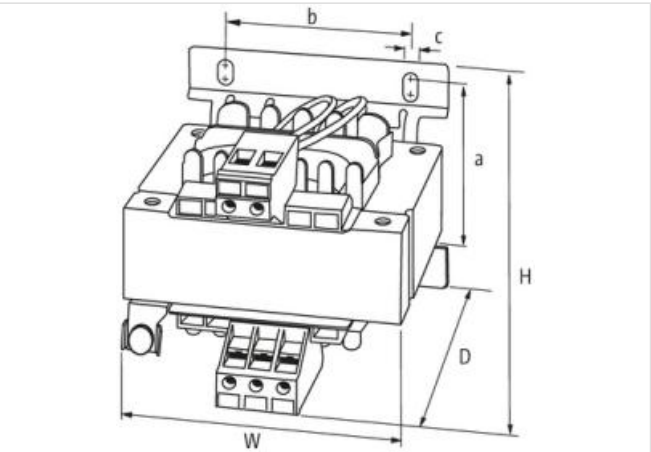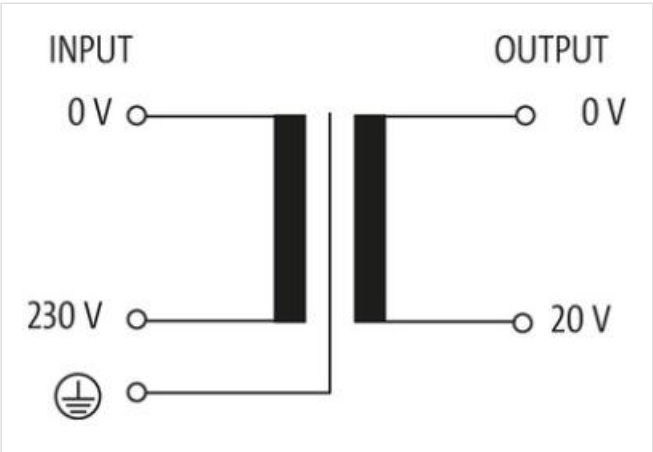

Product may differ from Image



Input	
Input voltage	230 V AC
Inrush current	6.6 A (230 V AC)
Short-circuit current	11.5 A (230 V AC)
Input current	0.81 A (230 V AC)
Frequency	50...60 Hz
Output	

Output voltage	20 V AC
----------------	---------

Output rating	160 VA
---------------	--------

**General data**

Standards	EN 61558-2-6, EN 62041 category 0
-----------	-----------------------------------

Mounting method	Key-hole mounting
-----------------	-------------------

Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
-------------------	---

Test isolation voltage	3.8 kV
------------------------	--------

Drill hole Ø	5.8×12 mm
--------------	-----------

Fixing centers a×b×c	75.3×84×5.8 mm
----------------------	----------------

Dimensions H×W×D	91×97×105 mm
------------------	--------------