

EMPARRO67 POWER SUPPLY 1-PHASE

IN: 100-240VAC OUT: 24VDC/8A


Emparro®67
INPUT: 90...265 V AC/90...265 V DC
OUTPUT: 24 V DC (SELV), ±2%
Current: 8 A

Link to Product

Illustration



Product may differ from Image

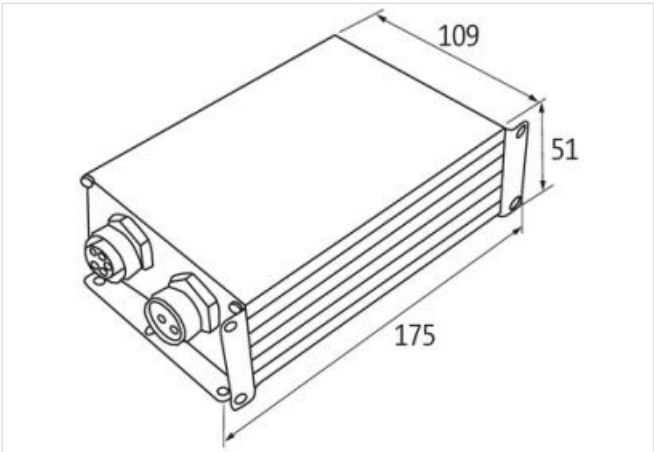

Input	
Input voltage	90...265 V AC/90...265 V DC
Connection	7/8" (male), 3-pole
Input current	2.1 A (100 V AC); 0.9 A (240 V AC)
Inrush current after 1 ms	max. 7 A (230 V AC)
Power factor	0.95 (230 V AC)
Frequency	50...60 Hz
Input fuse (internal)	6.3 A (T)
Output	
Output voltage	24 V DC (SELV), ±2%
Power Boost	I _{out} N × 150% (min. 4 s)
LED display	LED (green): OK; LED (red): overload, overheating or short-circuit
Connection	7/8" (female), 5-pole
Output current	8 A
Mains failure bridging time	min. 35 ms (230 V AC); 8 A (24 V DC)
Ripple	max. 30 mV eff/rms
Spikes	max. 300 mV ss/pp
Unit protection	Short-circuit, overload and temperature
Parallel usage/serial usage	max. 3 units/max. 2 units
General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55011 A, EN 61000-3-2

Mounting method	6 hole screw mounting
Temperature range	-40...+60 °C, ...+70 °C derating (storage temperature -40...+80 °C)
Relative humidity	4...100%
Protection	IP67
Efficiency	93.5% (115 V AC); 94.2% (230 V AC)
Dimensions H×W×D	51×109×175 mm