

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched power supply unit QUINT POWER, Pluggable screw connection, DIN rail mounting, SFB Technology (Selective Fuse Breaking), input: 1-phase, output: 48 V DC / 5 A

Product Description

QUINT POWER power supplies with maximum functionality

QUINT POWER circuit breakers magnetically and therefore quickly trip at six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

Reliable starting of heavy loads takes place via the static power reserve POWER BOOST. Thanks to the adjustable voltage, all ranges between 5 V DC ... 56 V DC are covered.

Your advantages

- Reliable starting of difficult loads
- Quick tripping of standard circuit breakers
- Preventive function monitoring

Commercial Data

| | |
|--------------------------------------|---------------------|
| Item number | 2866679 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product Key | CMPQ14 |
| Catalog Page | Page 213 (C-4-2017) |
| GTIN | 4046356307895 |
| Weight per Piece (including packing) | 1,494.75 g |
| Weight per Piece (excluding packing) | 1,481.5 g |
| Customs tariff number | 85044083 |
| Country of origin | TH |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Technical Data

Input data

AC operation

| | |
|--|--|
| Nominal input voltage range | 100 V AC ... 240 V AC |
| Input voltage range | 85 V AC ... 264 V AC |
| | 90 V DC ... 350 V DC |
| Input voltage range AC | 85 V AC ... 264 V AC |
| Input voltage range DC | 90 V DC ... 350 V DC |
| Electric strength, max. | 300 V AC |
| Voltage type of supply voltage | AC/DC |
| Inrush current | < 15 A (typical) |
| Inrush current integral (I^2t) | < 1.5 A ² s |
| AC frequency range | 45 Hz ... 65 Hz |
| Frequency range DC | 0 Hz |
| Mains buffering time | > 40 ms (120 V AC) |
| | > 40 ms (230 V AC) |
| Current consumption | 2.8 A (120 V AC) |
| | 1.2 A (230 V AC) |
| | 2.4 A (110 V DC) |
| | 1.2 A (220 V DC) |
| Nominal power consumption | 270 VA |
| Protective circuit | Transient surge protection; Varistor |
| Typical response time | < 0.5 s |
| Input fuse | 6.3 A (slow-blow, internal) |
| Permissible backup fuse | B10 B16 AC: |
| Permissible DC backup fuse | DC: Connect a suitable fuse upstream |
| Recommended breaker for input protection | 10 A ... 16 A (AC: Characteristics B, C, D, K) |
| Discharge current to PE | < 3.5 mA |

Output data

| | |
|--|---|
| Efficiency | > 92.5 % (for 230 V AC and nominal values) |
| Output characteristic | U/I |
| Nominal output voltage | 48 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 30 V DC ... 56 V DC (> 48 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 5 A (-25 °C ... 60 °C, U_{OUT} = 48 V DC) |
| POWER BOOST (I_{Boost}) | 7.5 A (-25 °C ... 40 °C permanent, U_{OUT} = 48 V DC) |
| Selective Fuse Breaking (I_{SFB}) | 30 A (12 ms) |
| Magnetic circuit breaker tripping | B2 / B4 / C2 |
| Derating | 60 °C ... 70 °C (2.5%/K) |
| Feedback voltage resistance | max. 60 V DC |
| Protection against overvoltage at the output (OVP) | < 60 V DC |
| | < 1 % (change in load, static 10 % ... 90 %) |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

| | |
|-----------------------------------|---|
| Control deviation | < 2 % (change in load, dynamic 10 % ... 90 %) |
| | < 0.1 % (change in input voltage ± 10 %) |
| Residual ripple | < 50 mV _{PP} (with nominal values) |
| Short-circuit-proof | yes |
| Output power | 240 W |
| Maximum no-load power dissipation | 7 W |
| Power loss nominal load max. | 21 W |
| Rise time | < 0.5 ms |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |

Signal: DC OK active

| | |
|-------------------------|--|
| Output description | $U_{OUT} > 0.9 \times U_N$: High signal |
| Switching voltage range | 18 V DC ... 24 V DC |
| Maximum inrush current | ≤ 20 mA (short-circuit-proof) |
| Continuous load current | ≤ 20 mA |

Signal: DC OK floating

| | |
|---------------------------|--|
| Output description | Relay contact, $U_{OUT} > 0.9 \times U_N$: Contact closed |
| Maximum switching voltage | 30 V AC |
| | 24 V DC |
| Maximum inrush current | 0.5 A |
| | 1 A |
| Continuous load current | ≤ 1 A |

Signal: POWER BOOST, active

| | |
|-------------------------|------------------------------------|
| Output description | $I_{OUT} < I_N$: High signal |
| Switching voltage range | 18 V DC ... 24 V DC |
| Output voltage | + 48 V DC |
| Maximum inrush current | ≤ 20 mA (short-circuit-proof) |
| Continuous load current | ≤ 20 mA |

Connection data

Input

| | |
|---------------------------------------|----------------------------|
| Connection method | Pluggable screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 16 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Output

| | |
|---------------------------------------|----------------------------|
| Connection method | Pluggable screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 16 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signal

| | |
|---------------------------------------|----------------------------|
| Connection method | Pluggable screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 16 |
| Conductor cross section AWG max. | 12 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signaling

| | |
|--------------------|-------------------------|
| Types of signaling | LED |
| | Active switching output |
| | Relay contact |

Signal output: DC OK active

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |
| | $I_{OUT} < I_N$: LED ON |

Signal output: DC OK floating

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |

Signal output: POWER BOOST, active

| | |
|----------------|--------------------------------------|
| Status display | $I_{OUT} > I_N$: LED "BOOST" yellow |
|----------------|--------------------------------------|

Electrical properties

| | |
|---------------------------------|---------------------|
| Number of phases | 1.00 |
| Insulation voltage input/output | 4 kV AC (type test) |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

| | |
|--------------------------------|-------------------------|
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (routine test) |
| Insulation voltage input / PE | 3.5 kV AC (type test) |
| | 2 kV AC (routine test) |

Product properties

| | |
|----------------------------|--------------------|
| Product type | Power supply |
| Product family | QUINT POWER |
| MTBF (IEC 61709, SN 29500) | > 950000 h (25 °C) |
| | > 530000 h (40 °C) |
| | > 235000 h (60 °C) |

Insulation characteristics

| | |
|---------------------|---|
| Protection class | I |
| Degree of pollution | 2 |

Dimensions

| | |
|--------|--------|
| Width | 60 mm |
| Height | 130 mm |
| Depth | 125 mm |

Installation dimensions

| | |
|----------------------------------|---------------|
| Installation distance right/left | 5 mm / 5 mm |
| Installation distance top/bottom | 50 mm / 50 mm |

Alternative assembly

| | |
|--------|--------|
| Width | 122 mm |
| Height | 130 mm |
| Depth | 63 mm |

Mounting

| | |
|-------------------------|---|
| Mounting type | DIN rail mounting |
| Assembly instructions | alignable: $P_N \geq 50\%$, 5 mm horizontally, 15 mm next to active components, 50 mm vertically alignable: $P_N < 50\%$, 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| With protective coating | No |

Material specifications

| | |
|------------------|--------------------------|
| Housing material | Metal |
| Type of housing | Steel sheet, zinc-plated |

Environmental and real-life conditions

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP20 |
|----------------------|------|

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

| | |
|--|---|
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Ambient temperature (start-up type tested) | -40 °C |
| Maximum altitude | 5000 m |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing) |
| Shock | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | < 15 Hz, amplitude ± 2.5 mm (according to IEC 60068-2-6) |
| | 15 Hz ... 150 Hz, 2.3g, 90 min. |

Standards and regulations

| | |
|--|------------------------|
| Rail applications | EN 50121-4 |
| | EN 50121-3-2 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Electrical safety | IEC 61010-2-201 (SELV) |
| Standard - Equipment safety | BG (design tested) |
| Standard - Approval for medical use | IEC 60601-1, 2 x MOOP |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178 |
| | IEC 61010-1 (SELV) |
| Standard – Safety extra-low voltage | IEC 61010-2-201 (PELV) |
| | IEC 61010-2-201 |
| Standard - Safe isolation | IEC 61010-1 |
| Standard - safety for equipment for measurement, control, and laboratory use | Semi F47-0706 |
| Overvoltage category | |
| EN 62477-1 | III |

Approvals

| | |
|--------------|--|
| CSA | CAN/CSA-C22.2 No. 60950-1-07 |
| | CSA-C22.2 No. 107.1-01 |
| UL approvals | UL Listed UL 508 |
| | UL/C-UL Recognized UL 60950-1 |
| | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

Conformity/Approvals

| | |
|-----------------------------------|---|
| SILCL in accordance with EN 62061 | 0 |
|-----------------------------------|---|

EMC data

| | |
|-------------------------------------|---|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

| | |
|-------------------------------|---|
| | EN 61000-6-2 |
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Noise emission | EN 55011 (EN 55022) |

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-------------------|----------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Comments | Criterion A |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|---------------------|-----------------------|
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range | 2 GHz ... 3 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|----------|------------------------------------|
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 2 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |

Surge voltage load (surge)

| | |
|-----------------------|---|
| Standards/regulations | EN 61000-4-5 |
| Input | 2 kV (Test Level 3 - symmetrical) 4 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) 2 kV (Test Level 3 - asymmetrical) |
| Signal | 1 kV (Test Level 2 - asymmetrical) |
| Comments | Criterion A |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

Conducted interference

| | |
|-----------------|---------------------|
| I/O/S | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

| | |
|----------|---------------------|
| Comments | Criterion A |
| Voltage | 10 V (Test Level 3) |

Emitted interference

| | |
|--|--|
| Standards/regulations | EN 61000-6-3 |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

Criteria


| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

QUINT-PS/1AC/48DC/ 5 - Power supply unit

2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Drawings

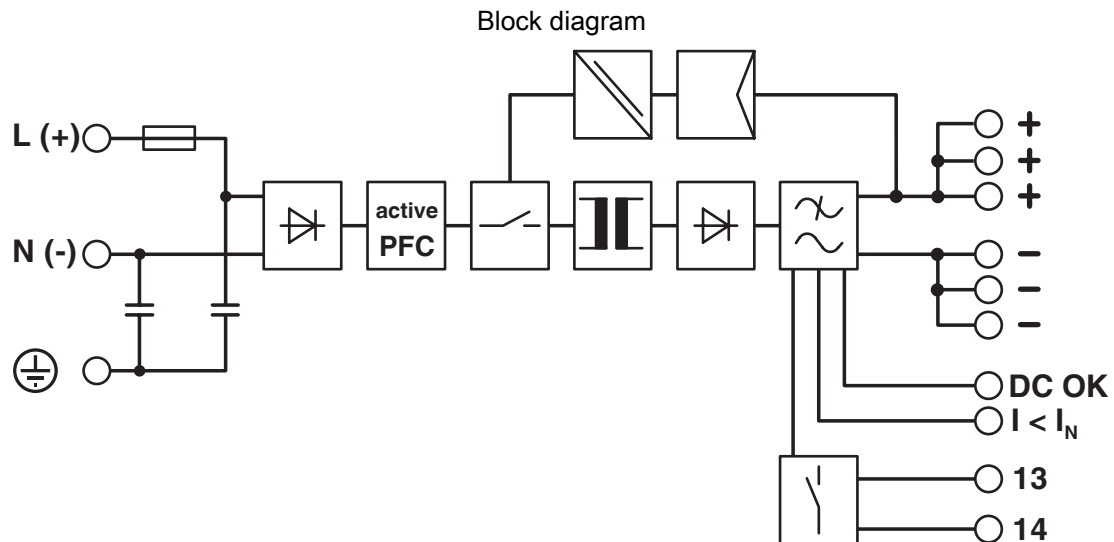

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2866679>



cUL Recognized
Approval ID: FILE E 211944



UL Recognized
Approval ID: FILE E 211944



IECEE CB Scheme
Approval ID: SI-2093 A1



EAC
Approval ID: EAC-Zulassung



EAC
Approval ID: EAC-Zulassung



UL Listed
Approval ID: FILE E 123528



cUL Listed
Approval ID: FILE E 123528



EAC
Approval ID: RU S-DE.BL08.W.00764



UL Recognized
Approval ID: FILE E 211944



IECEE CB Scheme
Approval ID: SI-2093 A1



cUL Recognized
Approval ID: FILE E 211944

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>



cUL Listed

Approval ID: FILE E 123528



UL Listed

Approval ID: FILE E 123528



EAC

Approval ID: RU S-DE.BL08.W.00764



EAC

Approval ID: RU S-DE.BL08.W.00764



EAC

Approval ID: RU S-DE.BL08.W.00764



cCSAus

Approval ID: 2162675



cCSAus

Approval ID: 2162675



cUL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827



cUL Listed

Approval ID: FILE E 199827

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27040701 |
| ECLASS-12.0 | 27040701 |
| ECLASS-13.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

QUINT-PS/1AC/48DC/ 5 - Power supply unit



2866679

<https://www.phoenixcontact.com/pc/products/2866679>

Environmental Product Compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 25; |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com