

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched power supply unit QUINT POWER, Screw connection, SFB Technology (Selective Fuse Breaking), input: 3-phase, output: 24 V DC / 20 A

Product Description

QUINT POWER power supplies with maximum functionality

QUINT POWER circuit breakers magnetically and therefore quickly trip at six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

Reliable starting of heavy loads takes place via the static power reserve POWER BOOST. Thanks to the adjustable voltage, all ranges between 5 V DC ... 56 V DC are covered.

Your advantages

- Reliable starting of difficult loads
- High level of system availability even in the event of permanent phase failure
- Preventive function monitoring

Commercial Data

| | |
|--------------------------------------|---------------------|
| Item number | 2866792 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product Key | CMPQ33 |
| Catalog Page | Page 161 (C-6-2015) |
| GTIN | 4046356152907 |
| Weight per Piece (including packing) | 1,832.4 g |
| Weight per Piece (excluding packing) | 1,500 g |
| Customs tariff number | 85044083 |
| Country of origin | TH |

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Technical Data

Input data

AC operation

| | |
|--|---|
| Nominal input voltage range | 3x 400 V AC ... 500 V AC |
| Input voltage range | 3x 320 V AC ... 575 V AC |
| | 2x 360 V AC ... 575 V AC |
| | 450 V DC ... 800 V DC |
| Input voltage range DC | 450 V DC ... 800 V DC |
| Voltage type of supply voltage | AC/DC |
| Inrush current | < 20 A (typical) |
| Inrush current integral (I^2t) | < 3.2 A ² s |
| AC frequency range | 45 Hz ... 65 Hz |
| Frequency range DC | 0 Hz |
| Mains buffering time | > 20 ms (400 V AC) |
| | > 30 ms (500 V AC) |
| Current consumption | 3x 1.6 A (400 V AC) |
| | 3x 1.3 A (500 V AC) |
| | 0.9 A (600 V DC) |
| Nominal power consumption | 783 VA |
| Protective circuit | Transient surge protection; Varistor, gas-filled surge arrester |
| Power factor (cos phi) | 0.66 |
| Typical response time | < 0.16 s |
| Permissible backup fuse | B6 B10 B16 AC: |
| Permissible DC backup fuse | DC: Connect a suitable fuse upstream |
| Recommended breaker for input protection | 6 A ... 16 A (AC: Characteristics B, C, D, K) |
| Discharge current to PE | < 3.5 mA |

Output data

| | |
|--|---|
| Efficiency | > 93 % (at 400 V AC and nominal values) |
| Output characteristic | U/I |
| Nominal output voltage | 24 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 18 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 20 A (-25 °C ... 60 °C, U_{OUT} = 24 V DC) |
| POWER BOOST (I_{Boost}) | 26 A (-25 °C ... 40 °C permanent, U_{OUT} = 24 V DC) |
| Selective Fuse Breaking (I_{SFB}) | 120 A (12 ms) |
| Magnetic circuit breaker tripping | B2 / B4 / B6 / B10 / B16 / C2 / C4 / C6 |
| Derating | 60 °C ... 70 °C (2.5%/K) |
| Feedback voltage resistance | max. 35 V DC |
| Protection against overvoltage at the output (OVP) | < 35 V DC |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) |
| | < 3 % (change in load, dynamic 10 % ... 90 %) |
| | < 0.1 % (change in input voltage \pm 10 %) |

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

| | |
|--------------------------------------|---|
| Residual ripple | < 40 mV _{PP} (with nominal values) |
| Output power | 480 W |
| Peak switching voltages nominal load | < 40 mV _{PP} (at nominal values, 20 MHz) |
| Maximum no-load power dissipation | 11 W |
| Power loss nominal load max. | 40 W |
| Rise time | < 0.05 s (U _{OUT} (10 % ... 90 %)) |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |

Signal: DC OK active

| | |
|-------------------------|---|
| Output description | U _{OUT} > 0.9 x U _N : High signal |
| Switching voltage range | 18 V ... 24 V |
| Output voltage | + 24 V DC |
| Maximum inrush current | ≤ 20 mA (short-circuit-proof) |
| Continuous load current | ≤ 20 mA |

Signal: DC OK floating

| | |
|---------------------------|---|
| Output description | Relay contact, U _{OUT} > 0.9 x U _N : Contact closed |
| Maximum switching voltage | 30 V AC/DC |
| | 24 V DC |
| Maximum inrush current | 0.5 A |
| | 1 A |
| Continuous load current | ≤ 1 A |

Signal: POWER BOOST, active

| | |
|-------------------------|---|
| Output description | I _{OUT} < I _N : High signal |
| Switching voltage range | 18 V ... 24 V |
| Output voltage | + 24 V DC |
| Maximum inrush current | ≤ 20 mA (short-circuit-proof) |
| Continuous load current | ≤ 20 mA |

Connection data

Input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 18 |
| Conductor cross section AWG max. | 10 |
| Stripping length | 7 mm |
| Screw thread | M4 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 12 |
| Conductor cross section AWG max. | 10 |
| Stripping length | 7 mm |
| Screw thread | M4 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signal

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section, rigid min. | 0.2 mm ² |
| Conductor cross section, rigid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 18 |
| Conductor cross section AWG max. | 10 |
| Screw thread | M4 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Signaling

| | |
|---------------------------|-------------------------|
| Types of signaling | LED |
| | Active switching output |
| | Relay contact |
| Operating voltage display | Green LED |

Signal output: DC OK active

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |

Signal output: DC OK floating

| | |
|------------------------|---|
| Status display | $U_{OUT} > 0.9 \times U_N$: "DC OK" LED green |
| Note on status display | $U_{OUT} < 0.9 \times U_N$: Flashing "DC OK" LED |

Signal output: POWER BOOST, active

| | |
|----------------|--------------------------------------|
| Status display | $I_{OUT} > I_N$: LED "BOOST" yellow |
|----------------|--------------------------------------|

Electrical properties

| | |
|---------------------------------|---------------------|
| Number of phases | 3.00 |
| Insulation voltage input/output | 4 kV AC (type test) |

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

| | |
|--------------------------------|-------------------------|
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (routine test) |
| Insulation voltage input / PE | 3.5 kV AC (type test) |
| | 2 kV AC (routine test) |

Product properties

| | |
|----------------------------|--------------------|
| Product type | Power supply |
| Product family | QUINT POWER |
| MTBF (IEC 61709, SN 29500) | > 900000 h (25 °C) |
| | > 534000 h (40 °C) |
| | > 250000 h (60 °C) |

Insulation characteristics

| | |
|---------------------|---|
| Protection class | I |
| Degree of pollution | 2 |

Dimensions

| | |
|--------|--------|
| Width | 69 mm |
| Height | 130 mm |
| Depth | 122 mm |

Alternative assembly

| | |
|--------|--------|
| Width | 122 mm |
| Height | 130 mm |
| Depth | 72 mm |

Mounting

| | |
|-------------------------|---|
| Assembly instructions | alignable: $P_N \geq 50\%$, 5 mm horizontally, 15 mm next to active components, 50 mm vertically alignable: $P_N < 50\%$, 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| With protective coating | No |

Material specifications

| | |
|----------------------|---|
| Housing material | Metal |
| Hood version | Galvanized sheet steel, free from chrome (VI) |
| Side element version | Aluminum |

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Ambient temperature (start-up type tested) | -40 °C |
| Maximum altitude | 5000 m |

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

| | |
|--|---|
| Climatic class | 3K3 (in acc. with EN 60721) |
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing) |
| Shock | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | < 15 Hz, amplitude ± 2.5 mm (according to IEC 60068-2-6) 15 Hz ... 150 Hz, 2.3g, 90 min. |

Standards and regulations

| | |
|--|--|
| Rail applications | EN 50121-4 EN 50121-3-2 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Electrical safety | IEC 61010-2-201 (SELV) |
| Standard - Equipment safety | GS (tested safety) |
| Standard - Approval for medical use | IEC 60601-1, 2 x MOOP |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178 |
| Standard – Safety extra-low voltage | IEC 61010-1 (SELV) IEC 61010-2-201 (PELV) |
| Standard - Safe isolation | IEC 61010-2-201 |
| Standard - safety for equipment for measurement, control, and laboratory use | IEC 61010-1 |
| Standard - surge resistance | VDE 0160 (curve W2) |
| Approval - requirement of the semiconductor industry with regard to mains voltage dips | SEMI F47-0706 Compliance Certificate |

Overvoltage category

| | |
|------------|-----|
| EN 62477-1 | III |
|------------|-----|

Approvals

| | |
|-----------------------|---|
| CSA | CAN/CSA-C22.2 No. 60950-1-07 CSA-C22.2 No. 107.1-01 |
| Shipbuilding approval | DNV GL (EMC B), ABS, LR, RINA, NK, BV |
| UL approvals | UL Listed UL 508 UL/C-UL Recognized UL 60950-1 (3-wire + PE, star net) UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

EMC data

| | |
|-------------------------------------|---|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EU |
| EMC requirements for noise emission | EN 61000-6-3 EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 EN 61000-6-2 |
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Electrostatic discharge

| | |
|-------------------|----------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Comments | Criterion A |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|---------------------|-----------------------|
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range | 2 GHz ... 3 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|----------|------------------------------------|
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 2 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion B |

Surge voltage load (surge)

| | |
|-----------------------|------------------------------------|
| Standards/regulations | EN 61000-4-5 |
| Input | 3 kV (Test Level 3 - symmetrical) |
| | 6 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 1 kV (Test Level 2 - asymmetrical) |
| Comments | Criterion A |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

Conducted interference

| | |
|-----------------|---------------------|
| I/O/S | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V (Test Level 3) |

Emitted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-6-3 |
|-----------------------|--------------|

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

| | |
|--|--|
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

Criteria

| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |


QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Drawings

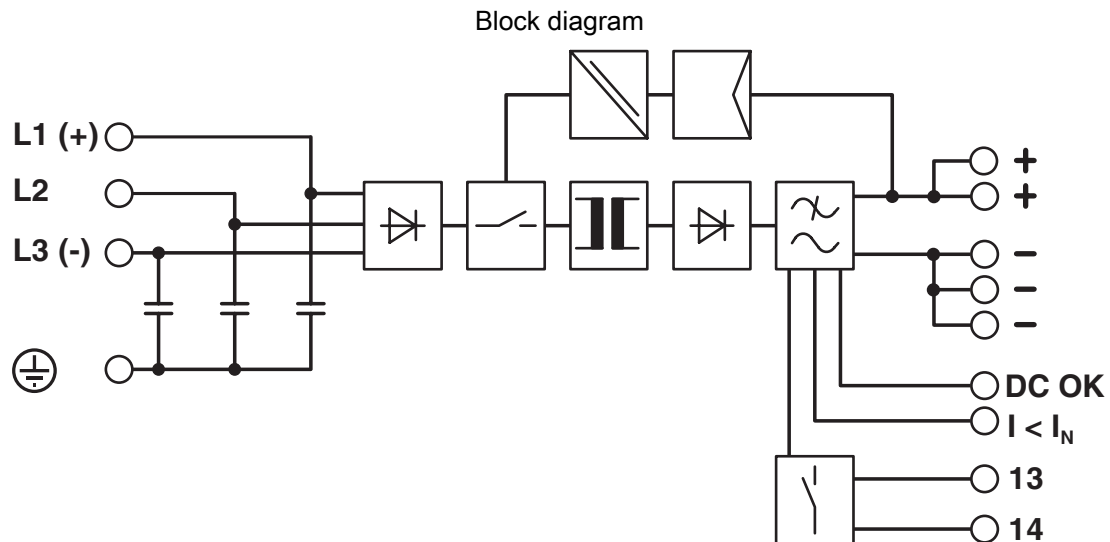

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2866792>



cUL Recognized
Approval ID: FILE E 211944



UL Recognized
Approval ID: FILE E 211944



IECEE CB Scheme
Approval ID: SI-2794



EAC
Approval ID: EAC-Zulassung



LR
Approval ID: LR22301698TA-02



NK
Approval ID: TA22564M



BV
Approval ID: 21004/C1 BV



EAC
Approval ID: EAC-Zulassung



UL Listed
Approval ID: FILE E 123528



RINA
Approval ID: ELE333522XG



Type approved
Approval ID: SI-SIQ BG 005/002

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>



EAC

Approval ID: RU S-DE.BL08.W.00764



UL Recognized

Approval ID: FILE E 211944



IECEE CB Scheme

Approval ID: SI-2794



cUL Recognized

Approval ID: FILE E 211944



UL Listed

Approval ID: FILE E 123528



BV

Approval ID: 21004/C1 BV



NK

Approval ID: TA22564M



RINA

Approval ID: ELE333522XG



LR

Approval ID: LR22301698TA-02



Type approved

Approval ID: SI-SIQ BG 005/002



EAC

Approval ID: RU S-DE.BL08.W.00764



EAC

Approval ID: RU S-DE.BL08.W.00764

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>



EAC

Approval ID: RU S-DE.BL08.W.00764



cUL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827



cUL Listed

Approval ID: FILE E 199827

QUINT-PS/3AC/24DC/20 - Power supply unit



2866792

<https://www.phoenixcontact.com/pc/products/2866792>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27040701 |
| ECLASS-12.0 | 27040701 |
| ECLASS-13.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com