

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

0...230V PG9

Form A (18 mm) for pressure switch

0...230 V AC/DC

without components



PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

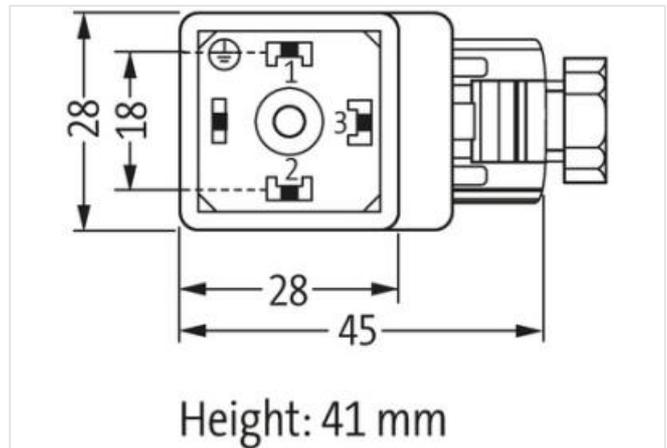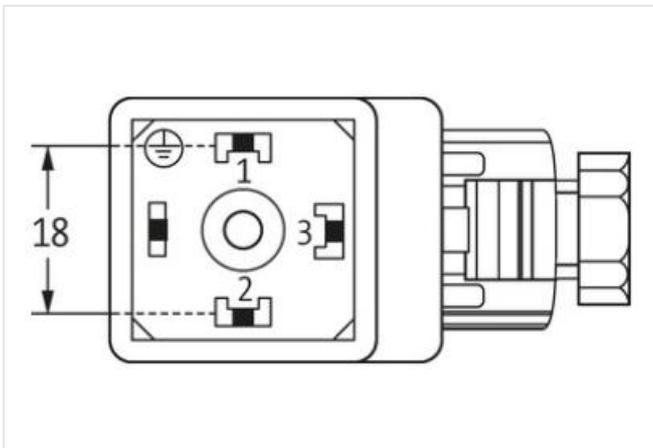

Product may differ from Image



Technical Data

| | |
|-------------------------------|--------------------------------|
| Operating voltage | max. 230 V AC/DC |
| Operating current per contact | max. 10 A |
| Locking of ports | M3 (recommended torque 0.4 Nm) |
| Sealing range (cable Ø) | 5...9.5 mm |

| | |
|------------|--|
| Protection | IP65 inserted and tightened (EN 60529) |
|------------|--|

| | |
|-------------------|-----|
| Compression gland | PG9 |
|-------------------|-----|

| | |
|---------------|-----------------|
| Configuration | 3 contacts + PE |
|---------------|-----------------|

General data

| | |
|-----------------|---------------------|
| Mounting method | inserted, tightened |
|-----------------|---------------------|

| | |
|-------------------|--------------|
| Temperature range | -20...+60 °C |
|-------------------|--------------|