

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

24V LED+Z-Diode M16x1.5

Form B (10 mm)

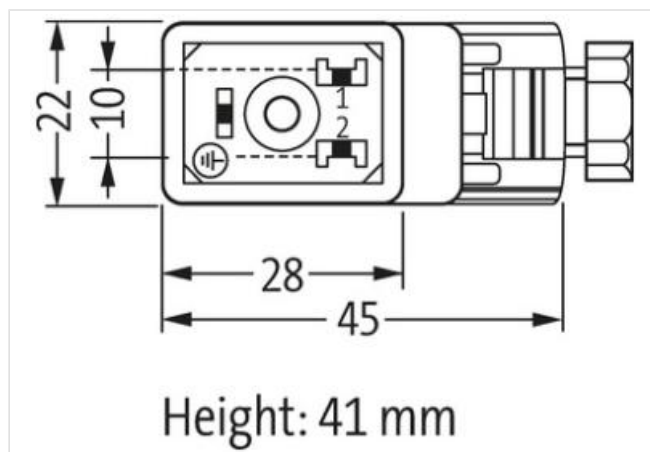
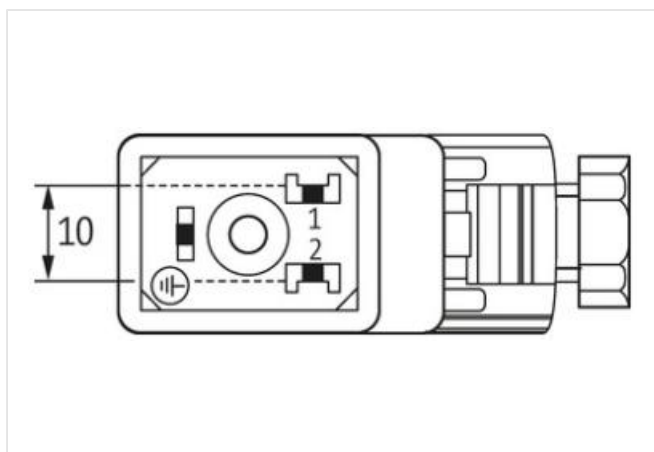
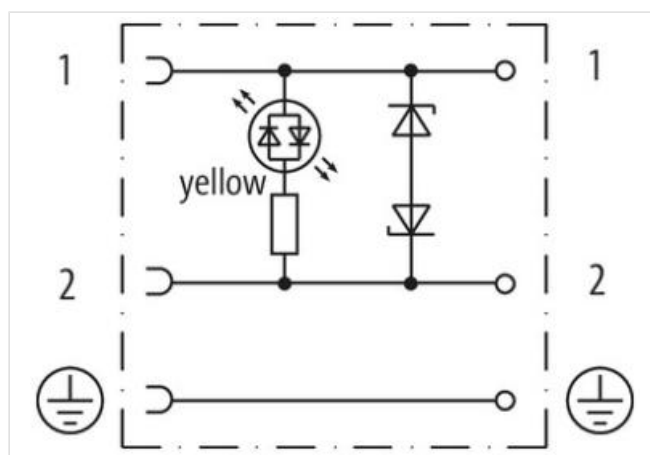
 24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and Z-diode

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)
Illustration


Product may differ from Image

Technical Data

Operating voltage	24 V AC $\pm 20\%$ / DC $\pm 25\%$
Operating current per contact	max. 4 A
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Configuration	2 contacts + PE

General data

Temperature range	-20...+60 °C
-------------------	--------------