

T-Coupler SlimLine M8 male / 2x M8 female A-cod.

4-pol. / 2x 3-pol.

T-coupler (Slim Line)

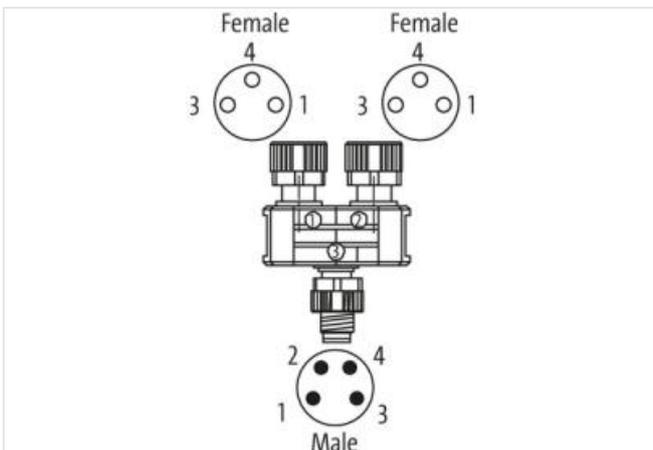
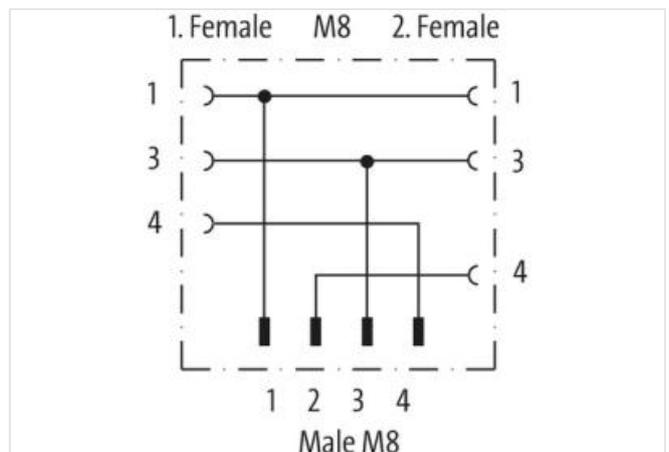
Male straight – females straight

M8 – M8, 4-pole

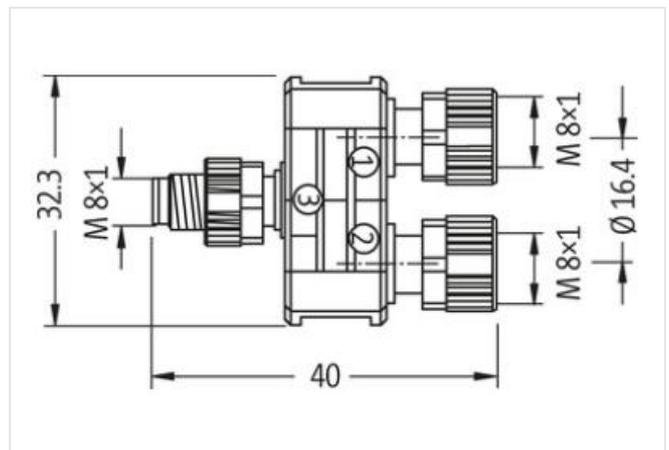
Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	50 V AC/60 V DC
Operating voltage (only UL listed)	30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A

Material group	IEC 60664-1, category I
Locking of ports	Screw thread (M8×1 mm) recommended torque 0.4 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
General data	
Pollution Degree	3
Temperature range	-25...+85 °C