

EVOLUTION POWER SUPPLY 3-PHASE,

IN: 360-520VAC OUT: 22-28V/10ADC


INPUT: 3× 360...520 V AC / 480...745 V DC  
OUTPUT: 22...28 V DC  
Current: 10 A

Link to Product

Illustration



Product may differ from Image

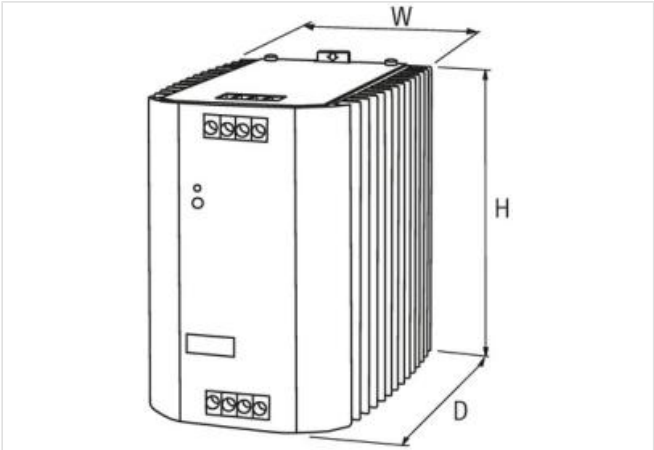

Input	
Input voltage	3× 324...572 V AC/480...745 V DC
Primary fusing external	3× 10 A (T)
Input current	3× 0.8 A
Inrush current after 1 ms	max. 15 A
Frequency	50...60 Hz
Output	
Output voltage	24 V DC (SELV), ±1%; 22...28 V adjustable
Power Boost	I <sub>out</sub> N × 150% (min. 4 s)
LED display	LED (green): OK; LED (red): overload
Output current	10 A (+55 °C); 6.5 A (+70 °C)
Mains failure bridging time	min. 19 ms (400 V AC)
Ripple	max. 50 mV eff/rms
Spikes	max. 100 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units
General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2, SEMI F47
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+70 °C (storage temperature -40...+85 °C)
Relative humidity	5...95%, no condensation

Protection	IP20
Efficiency	90% (3× 400 V AC); 90% (3× 520 V AC)
Connection	Screw terminals
Dimensions H×W×D	132×93×114 mm